Parts 1 & 2.

DESIGNS

FOR

ENCAUSTIC AND GEOMETRICAL TILE PAVEMENTS,

MANUFACTURED BY

THE

AUSTRALIAN TESSELATED TILE CO.

LIMITED,

MITCHAM, VICTORIA,

AUSTRALIA.

EDGAR E. WALKER, MANAGER.

HEAD OFFICE AND WORKS: MITCHAM.

WAREHOUSE AND SHOW ROOMS: 264 SWAN STREET,

AND RAILWAY SIDING, BURNLEY.

REGISTERED COPYRIGHT

MITCHAM.
OCT 16 1900

Price List for Mr. Silvanus Wilmot
Launceston Tasmania

Patt No.	per sq yd	Best quality Patt No.	per sq yd	Best quality Patt No.	per sq yd	Best quality Patt No.	per sq yd
1/3	4/9	22/23	7/9	35	7/3	52	7/9
4/6	5/.	24	6/.	36	7/3	53	7/9
7/12	6/.	25	9/6	37	8/4	54	7/9
13	8/6	26	7/3	38	9/.	55	6/9
14	6/3	27	10/.	39	9/9	56	7/3
15	9/.	28	10/6	40	9/3	57	6/6
16	7/.	29	9/6	41/43	6/.	58	12/.
17	6/.	30	6/3	44	7/.	59	11/9
18	6/3	31	9/3	45/48	6/.	60	11/3
19	7/.	32	9/6	49	7/.	61	9/.
20	7/6	33	12/.	50	6/.	62	12/3
21	6/3	34	9/6	51	6/.	63	12/3

Glazed Hearths up to $\frac{2}{3}$ yd

Nos. 1. 2. 7	10/6 ea
3. 4. 5. 8	18/. ea
6	16/.
9. 10. 12	14/. ea
11. 14 15. 16	12/6 ea

Terms as per letter of even date

Final Yield of Different Varieties of Cotton

Guntur Station

Serial No.	Variety	Yield in lbs. per acre	Yield in lbs. per acre	Yield in lbs. per acre	Yield in lbs. per acre	Yield in lbs. per acre	Yield in lbs. per acre
1	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
2	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
3	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
4	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
5	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
6	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
7	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
8	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
9	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
10	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
11	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
12	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
13	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
14	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
15	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
16	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
17	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]
18	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]	[illegible]

THE

Australian Tesselated Tile Co.

PROPRIETARY LIMITED,

MITCHAM, VICTORIA.

ESTABLISHED 1886.

MANUFACTURERS OF

TESSELATED & ENCAUSTIC TILE PAVEMENTS,

GUTTER BRICKS,

Patent Garden Edgings & Tiles,

AGRICULTURAL DRAIN PIPES & GUTTER TILES.

EDGAR E. WALKER, Manager.

N.B.—GOODS FORWARDED TO ANY RAILWAY STATION IN THE COLONY.

Melbourne:

SANDS & McDOUGALL LIMITED, PRINTERS, 365 COLLINS STREET.

1896.

REGISTERED COPYRIGHT

ESTABLISHED 1886.

The Australian Tesselated Tile Co.

PROPRIETARY LIMITED,

MITCHAM, VICTORIA.

MANUFACTURERS OF

TESSELATED AND ENCAUSTIC TILE PAVEMENTS

FOR

Halls, Vestibules, Conservatories, Verandahs, Sugar and Jam Factories, Creameries, Freezing Works, etc.

Church and Chancel Enrichments.

GLAZED TILES

FOR

Hearths, Fire-places, Cheeks and Backs, Dados, etc., in Majolica and Embossed Patterns; also Plain and Richly-colored Glazes.

ROOFING TILES, of improved Color and Quality.

TERRA COTTA FINIALS, TERMINALS, AND RIDGING.

PATENT GARDEN EDGINGS & FLOORING TILES.

AGRICULTURAL DRAIN PIPES, Etc.

SPECIAL BLACK ORNAMENTAL BRICKS.

REGISTERED COPYRIGHT

THE
AUSTRALIAN TESSELATED TILE CO.

PROPRIETARY LIMITED.

THE works of the Company are situated at Mitcham, Victoria, and are connected with the Railway system of the colony, so that their manufactures are transported to any inland town or port of shipment at a minimum of cost and handling, thus enabling the Company to execute orders with promptitude and economy.

The Company keep a large and varied stock always on hand, so are enabled to supply, at short notice, a variety of patterns; and are by no means confined to the designs herewith, but can supply an extensive variety, which can be prepared for inspection at their warehouse, or forwarded on application. In the case of public halls, churches, etc., it is without doubt preferable that special designs should be prepared, when all matters of detail can be considered; in all such cases it is desirable to state the style and color of building, and also whether the area to be tiled is well lighted or otherwise.

The Company manufacture tiles suitable for any traffic or wear they are intended to receive. The first quality is hard and dense in texture, of superior color, and finely finished, and are suitable for any position intended for traffic, or where an enriched and pleasing effect is desired. Their well-known "Patent" quality is prepared more especially for use in factories, kitchens, sculleries, ships, etc., and is equally hard and durable. ***For butter factories, creameries, cool stores, sugar refineries, and jam factories,*** the Company manufacture tiles of special strength and thickness, which have been subjected to severe tests and heavy traffic, and are highly recommended; being clean, cool, and durable, they are consequently the best and cheapest form of flooring, and especially adapted for the heat of the colonies.

Applications for Estimates.—In ordering tiles, it is necessary to clearly state the number of pattern selected, and to furnish an exact plan of the spaces to be covered, showing all the dimensions, including doorways, entrances, and recesses intended to be paved, correctly represented and marked in figures, special care being taken where walls are not parallel to supply the distances of various angles. These particulars enable the Company to prepare a working drawing of the entire pavement, showing how the pattern is arranged; such working drawing is essential for supplying the correct quantities of tiles for completing the pavement, and serves as a guide to the tile-pavior in fixing every tile in its proper place.

In executing orders it is customary to supply a small quantity of each description of tile in excess of what will actually cover the space, as it invariably happens that some are either damaged in transit, or broken by the workmen when cutting and fixing—this excess in such cases saves delay and expense. For these additional tiles a proportionate charge is made in the invoice.

The Company, when requested, will furnish a tender for any given quantity, which, if desired, will also cover the cost of sending competent workmen to fix the tiles; the total may include all expenses connected with the work, excepting that of preparing the foundation, such work should be done by the builder or masons, leaving, for tiles and cement bed below the proposed level of floor—where tiles of half-inch in thickness are to be used, a depth of three-quarters or seven-eighths of an inch; and for tiles one inch in thickness, one inch and a quarter or one inch and three-eighths.

REGISTERED COPYRIGHT

As the permanency of tile pavements depends largely upon the foundation, in order to prevent the tiles becoming uneven or displaced, we strongly urge that they be laid on a concrete bed of three or four inches in thickness, which has been well ramr 1 and made solid, and floated level with cement mortar, which when dry is ready to receive the tiles.

It is desirable in all cases that thoroughly trained workmen should be employed to carry out the work. Much dissatisfaction and annoyance will thus be avoided. The beauty of a pavement largely depends on its proper fixing.

Care must be taken in preparing foundations that no unslaked lime or core is included with materials, as these are liable to swell and displace the pavement.

As the durability of tile work depends largely upon the materials employed, good cement, not too quick in setting, should be used; and the sand should be clean and sharp, and *especially free from black bituminous* substances, which are liable to stain the tiles.

The tiles should be well soaked in clean water before being laid, and the foundations kept thoroughly wet during the progress of the work.

When the tiles require to be cut, rule a line across the face where necessary they should be divided, place the tile on a sanded stone or slab, and with a small, hard, sharp chisel and hammer bruise the face by passing the chisel backwards and forwards along the line two or three times, when on giving it a sharp tap on the back, exactly where it has been chiselled, the parts will easily separate, after which chip back or grind the edges even.

The pavement should not be walked upon for three or four days after completion; boards should be placed on the pavements for a few days to walk upon, as, on first being laid, they are liable to injury from the effects of traffic, and, unless protected, may be permanently disfigured.

A layer of clean white sawdust should be spread over the pavement immediately the fixing is completed, to prevent damage from paint spots and other stains, pending the completion of the surrounding work.

It is desirable for the satisfactory completion of orders that ample time be given for their execution, so that where it is necessary to manufacture, every consideration can be given to the work in hand.

Terra Cotta Ridging, Terminals, Finials—plain and grotesque—of improved quality and color, are now manufactured by this Company, made to order and executed to architects' designs.

DIRECTIONS FOR KEEPING THE PAVEMENTS CLEAN.

WASH with cold water and soft soap, applied with a scrubbing brush. This will improve the colors and remove saline scum arising from the cement the first few weeks after the tiles are laid. During that time the tiles should be frequently washed. Stains or dirt, from neglect of cleaning, may be removed by muriatic acid (spirits of salts), diluted with half water, and applied with a pumice stone. The acid must be carefully wiped off, and always, after washing, the tiles should be wiped with a clean dry cloth. The water used should be perfectly clean.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

PROPRIETARY

No. 1.

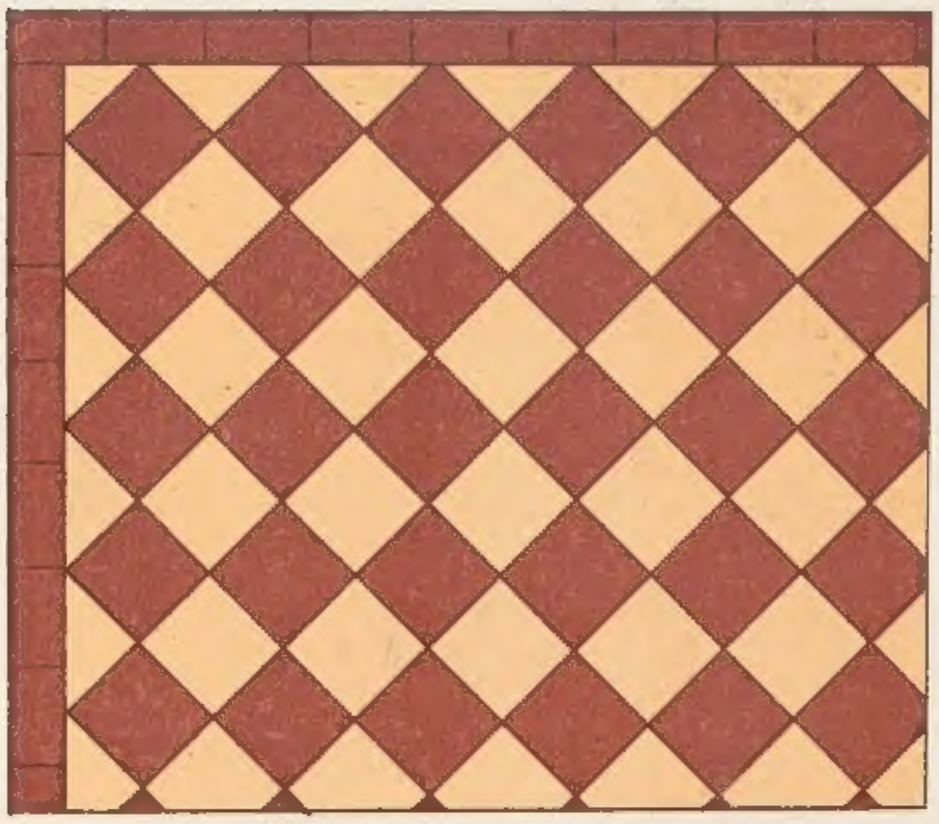

No. 2.

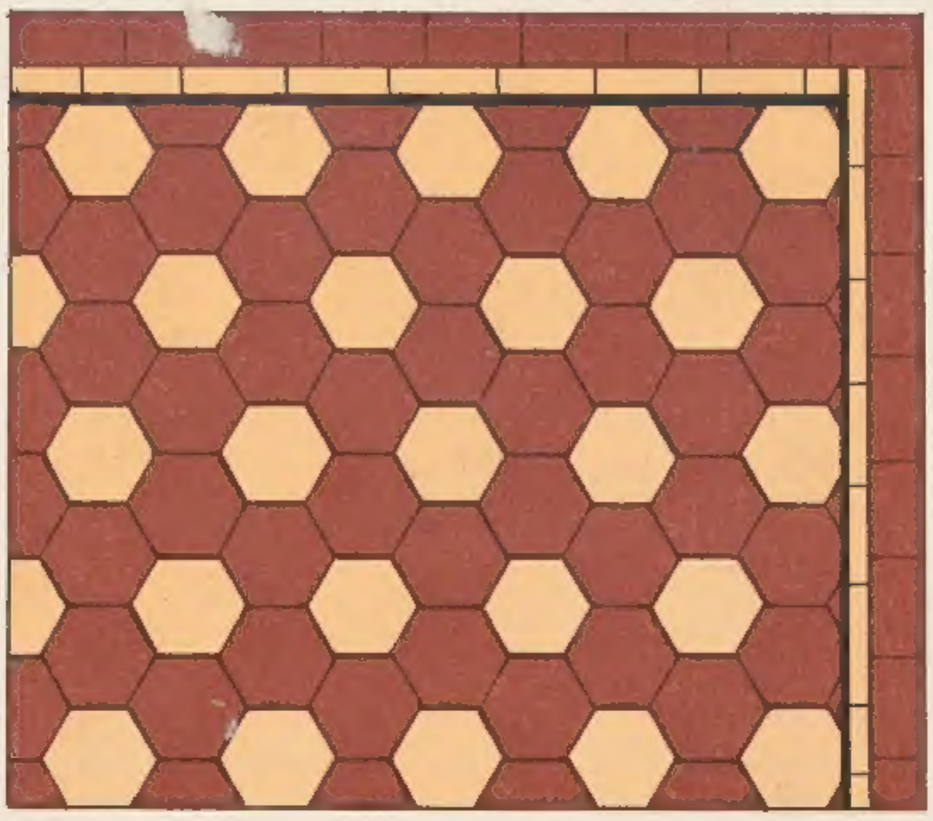

No. 3.

No. 4.

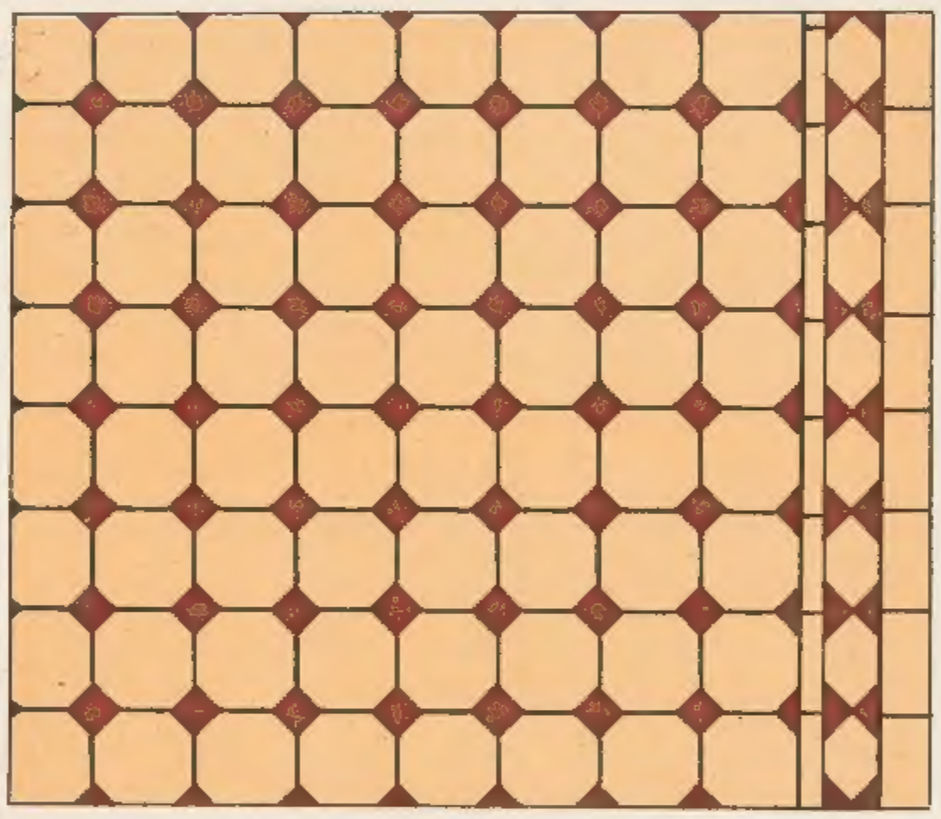

No. 5.

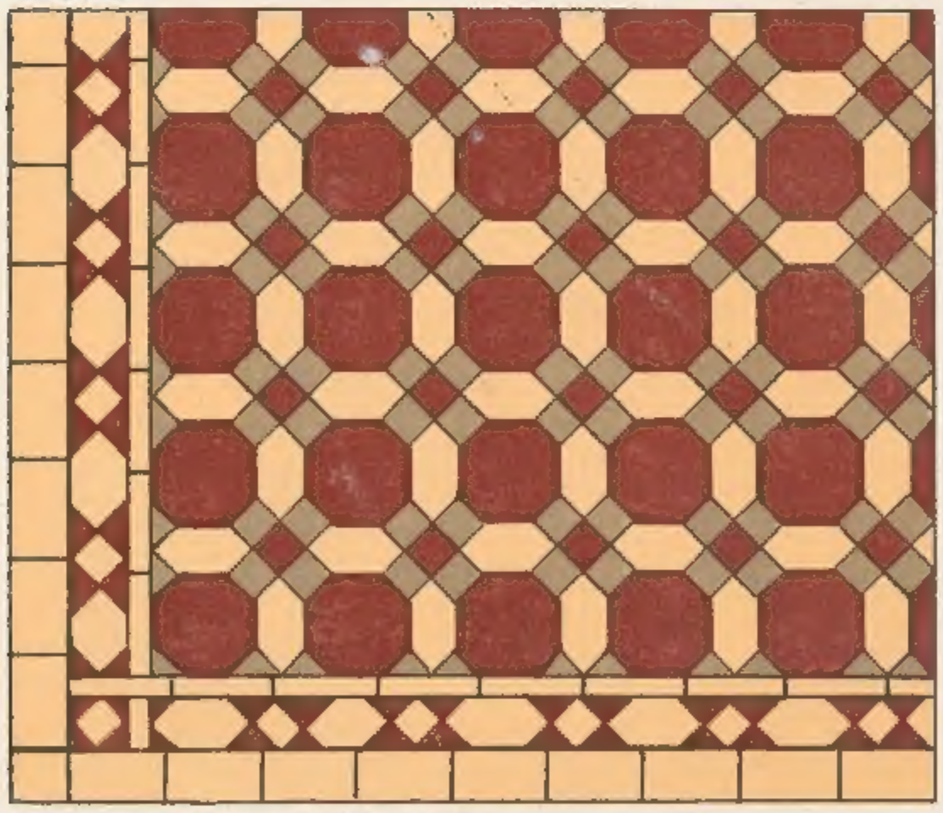

No. 6.

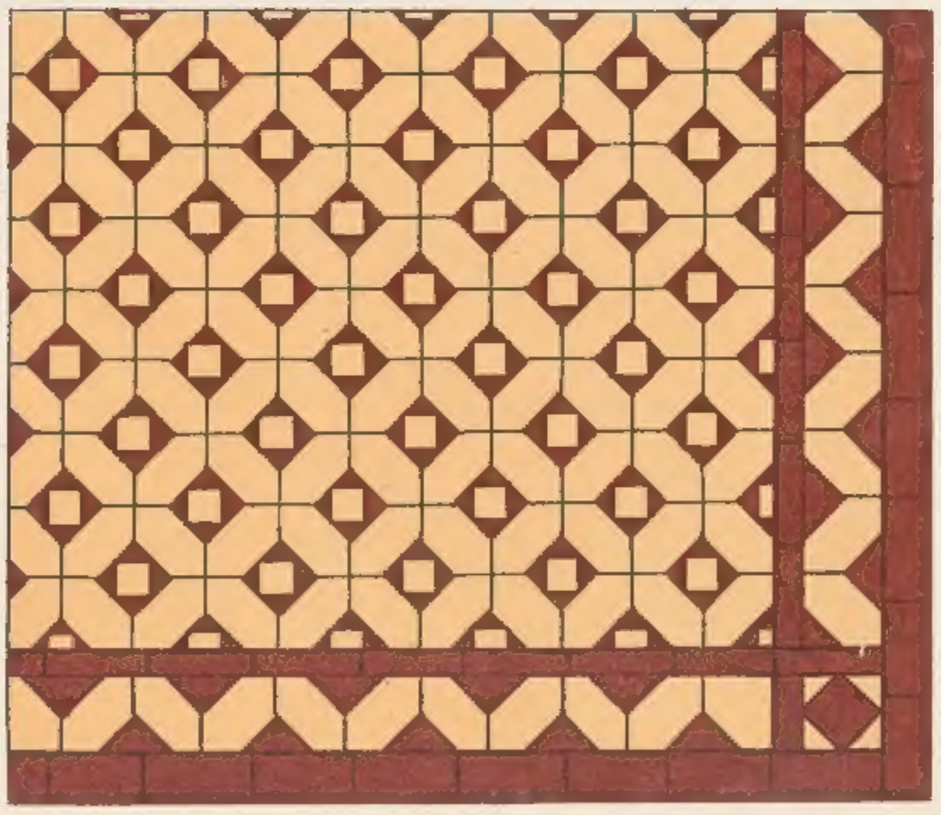

SANDS & McDOUGALL LIMITED, MELB.

REGISTERED COPYRIGHT

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

No. 7.

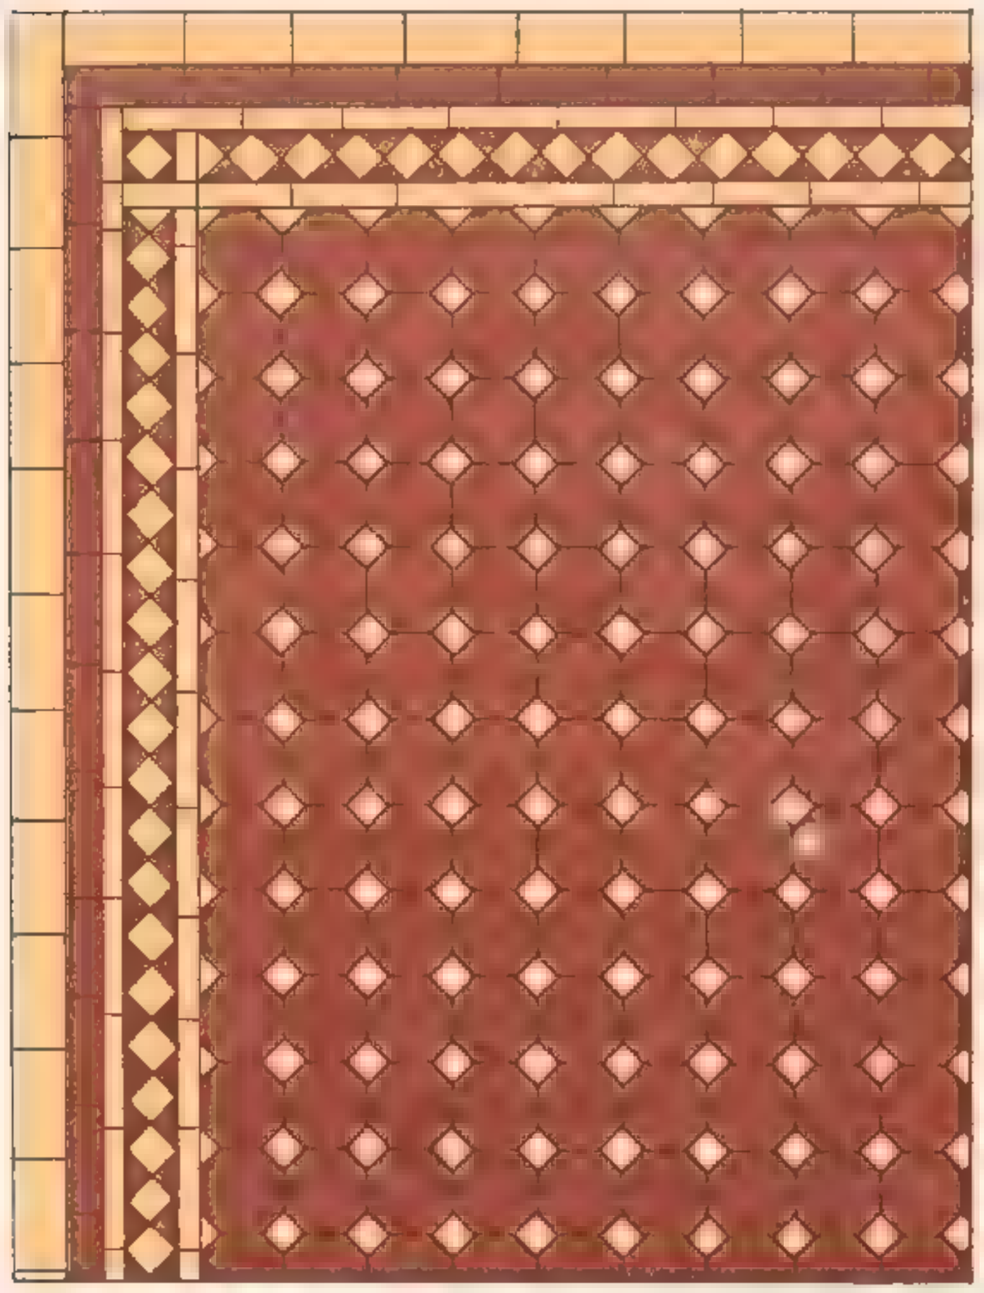

No. 8.

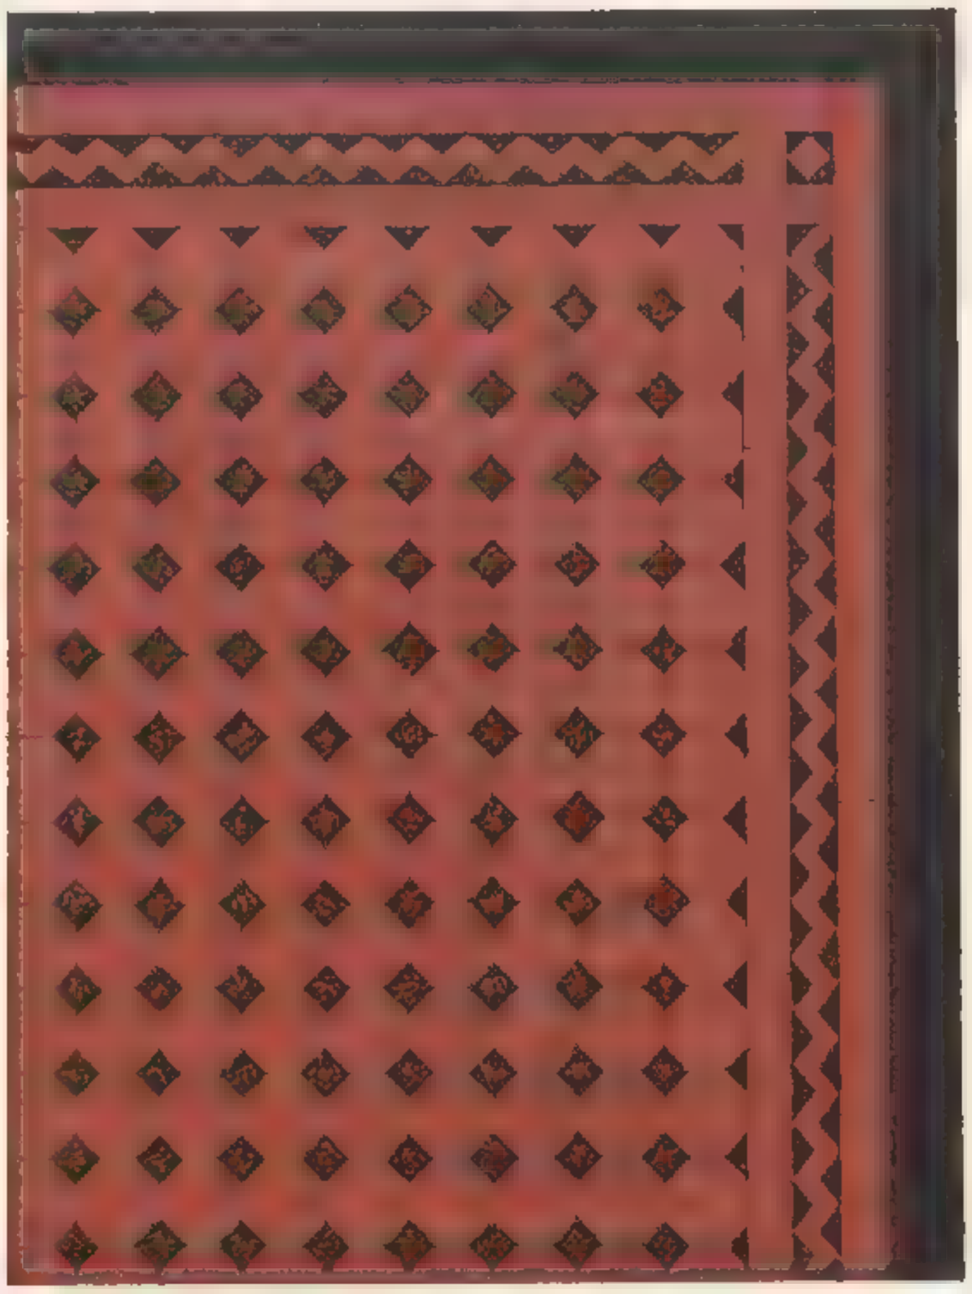

No. 9.

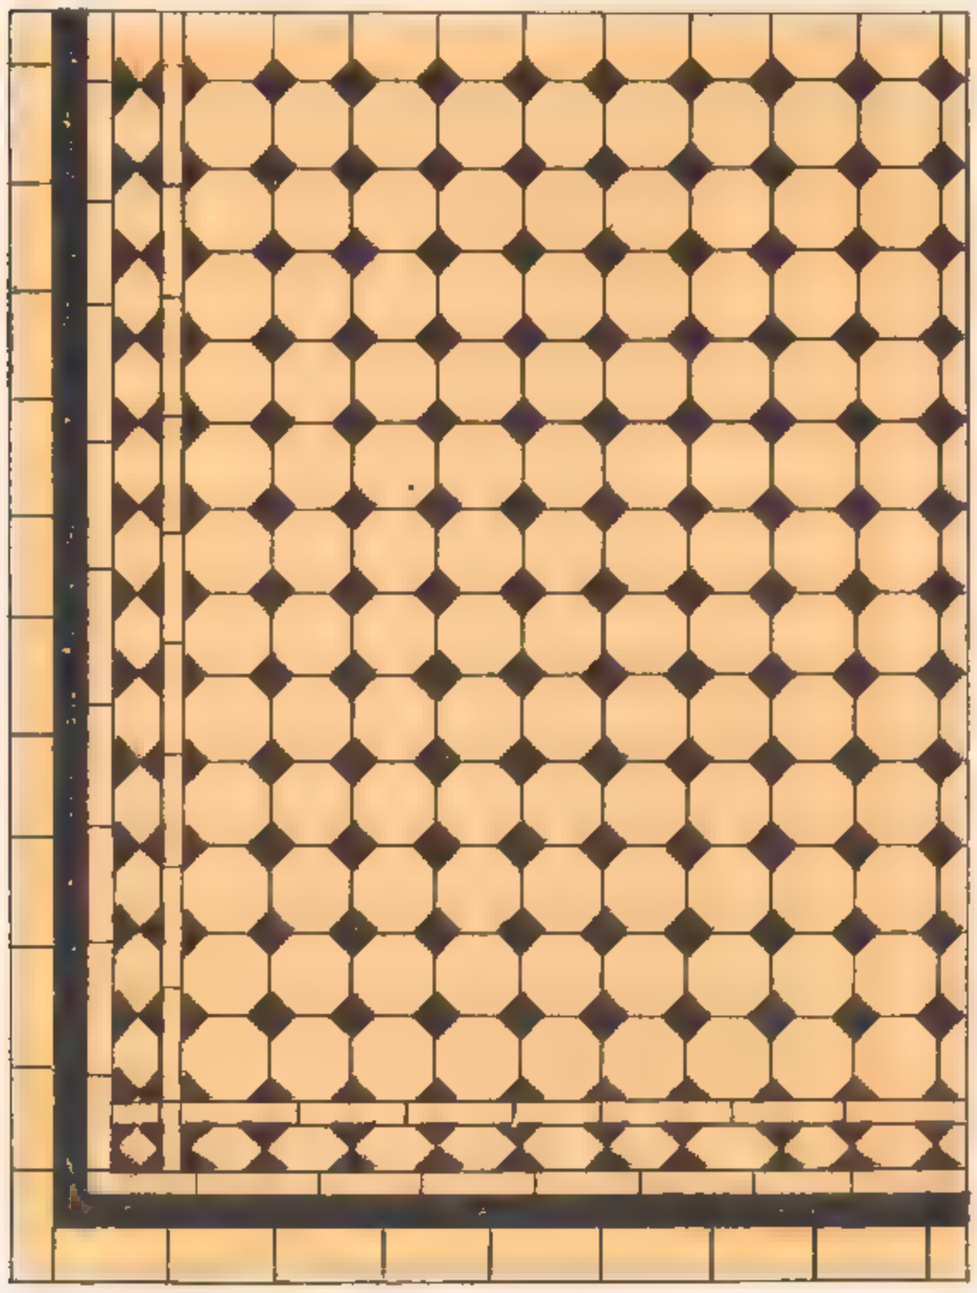

No. 10.

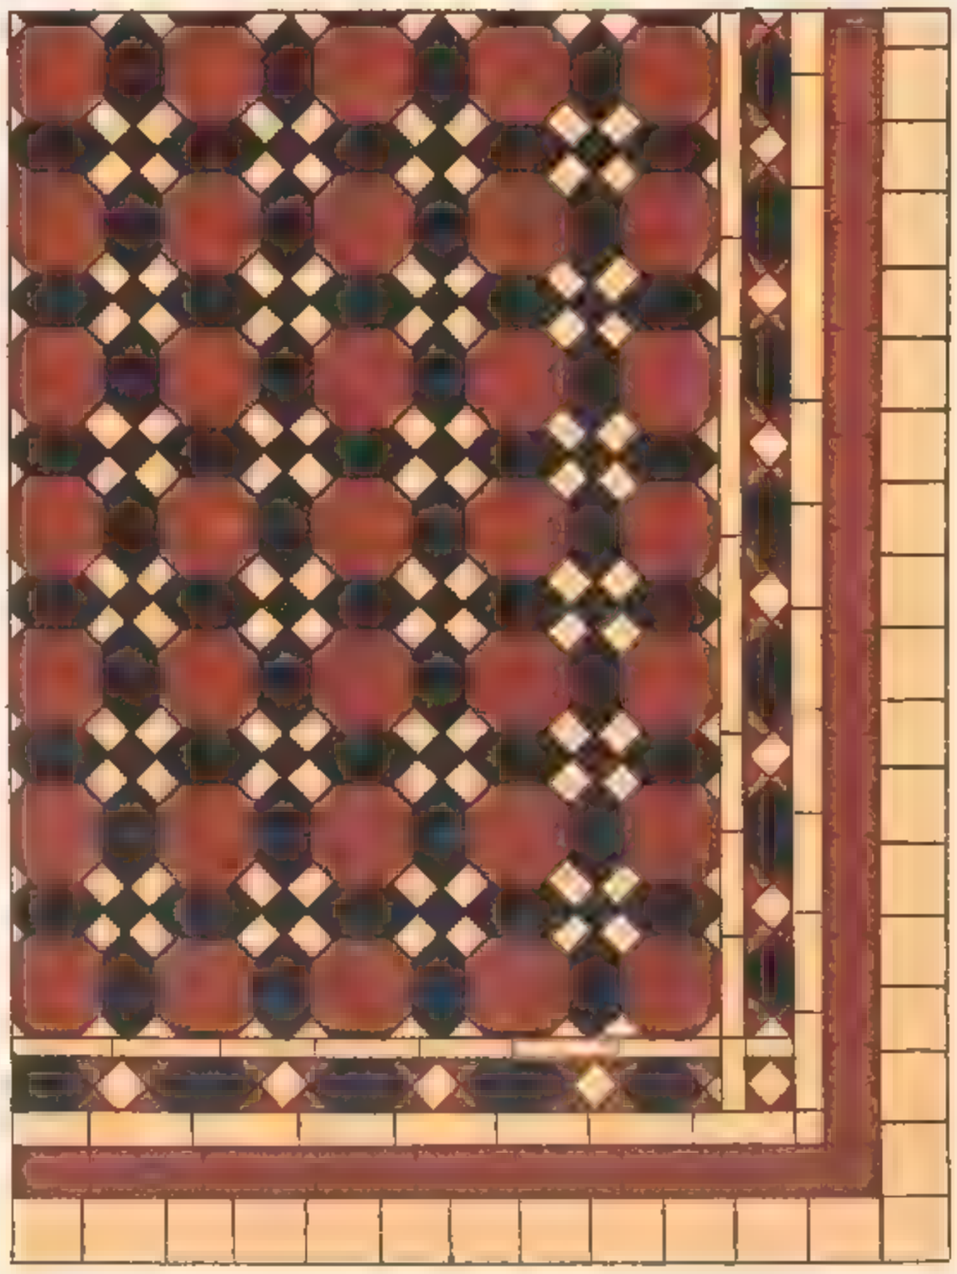

SANDS & McDOUGALL LIMITED MELB

SCALE, ¾ INCH TO A FOOT.

REGISTERED COPYRIGHT

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

No. 11.

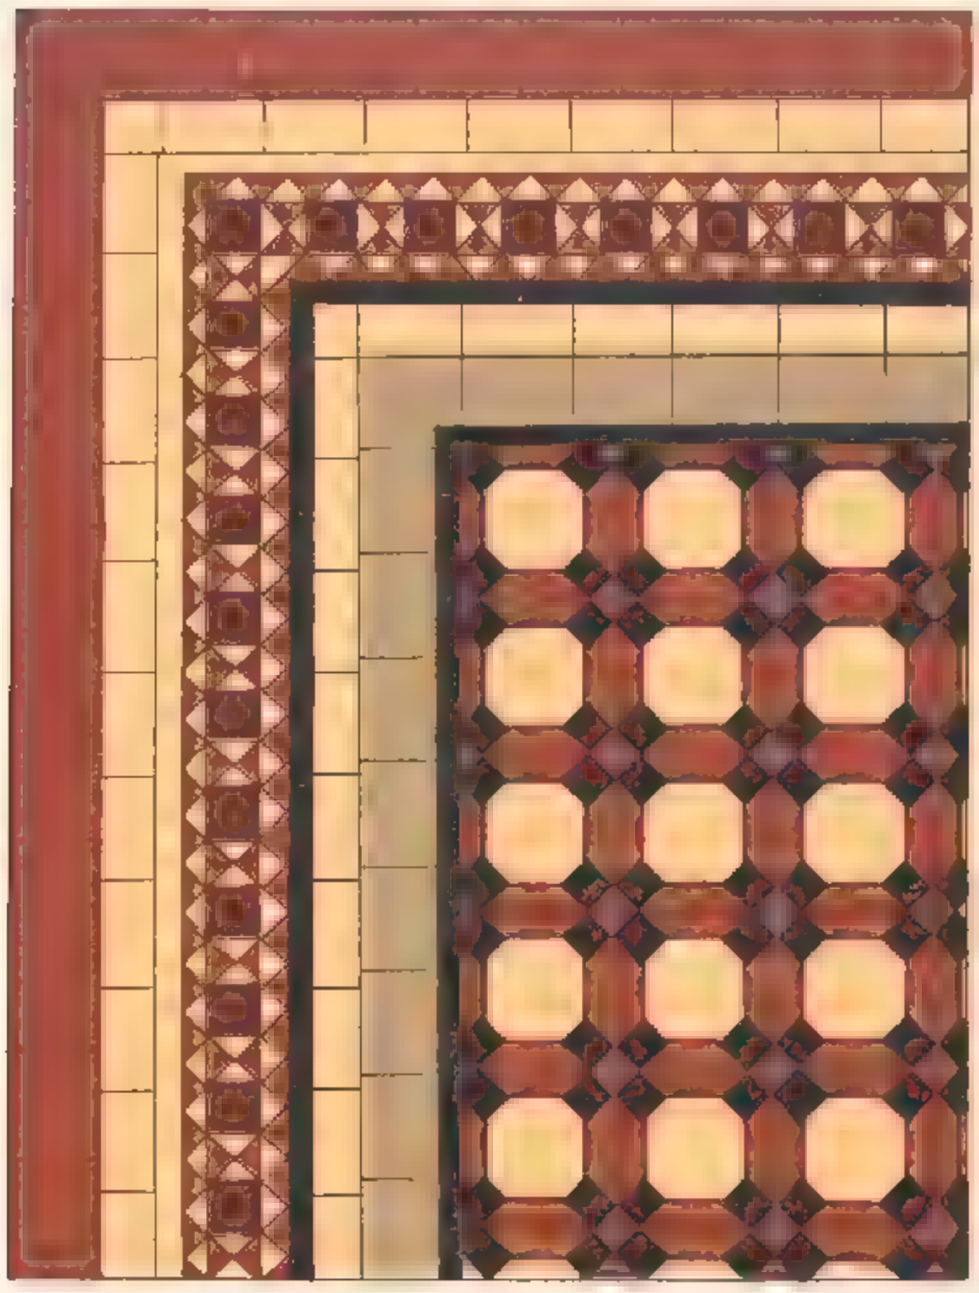

No. 12.

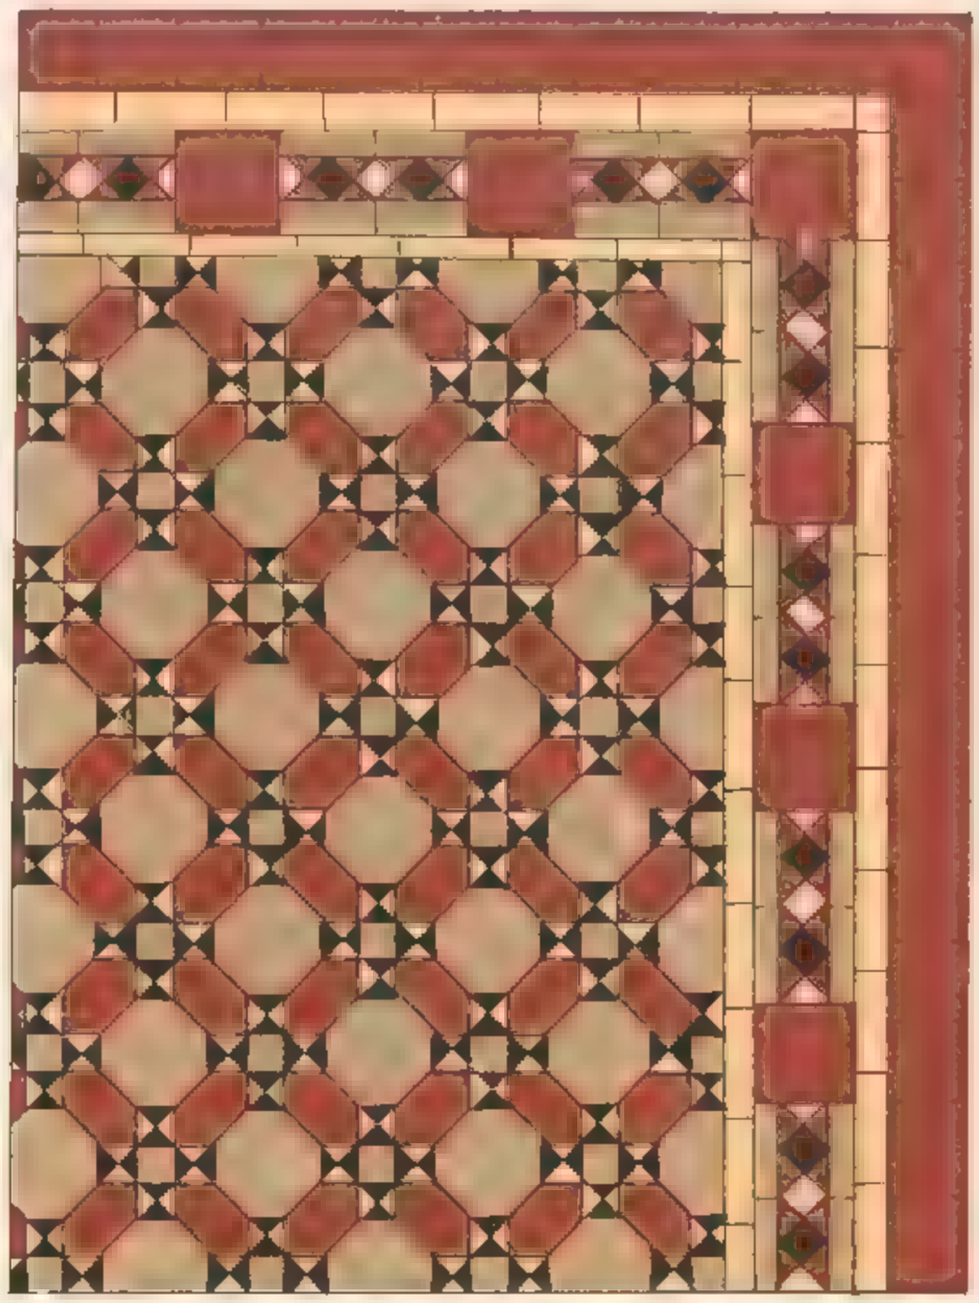

No. 13.

No. 14.

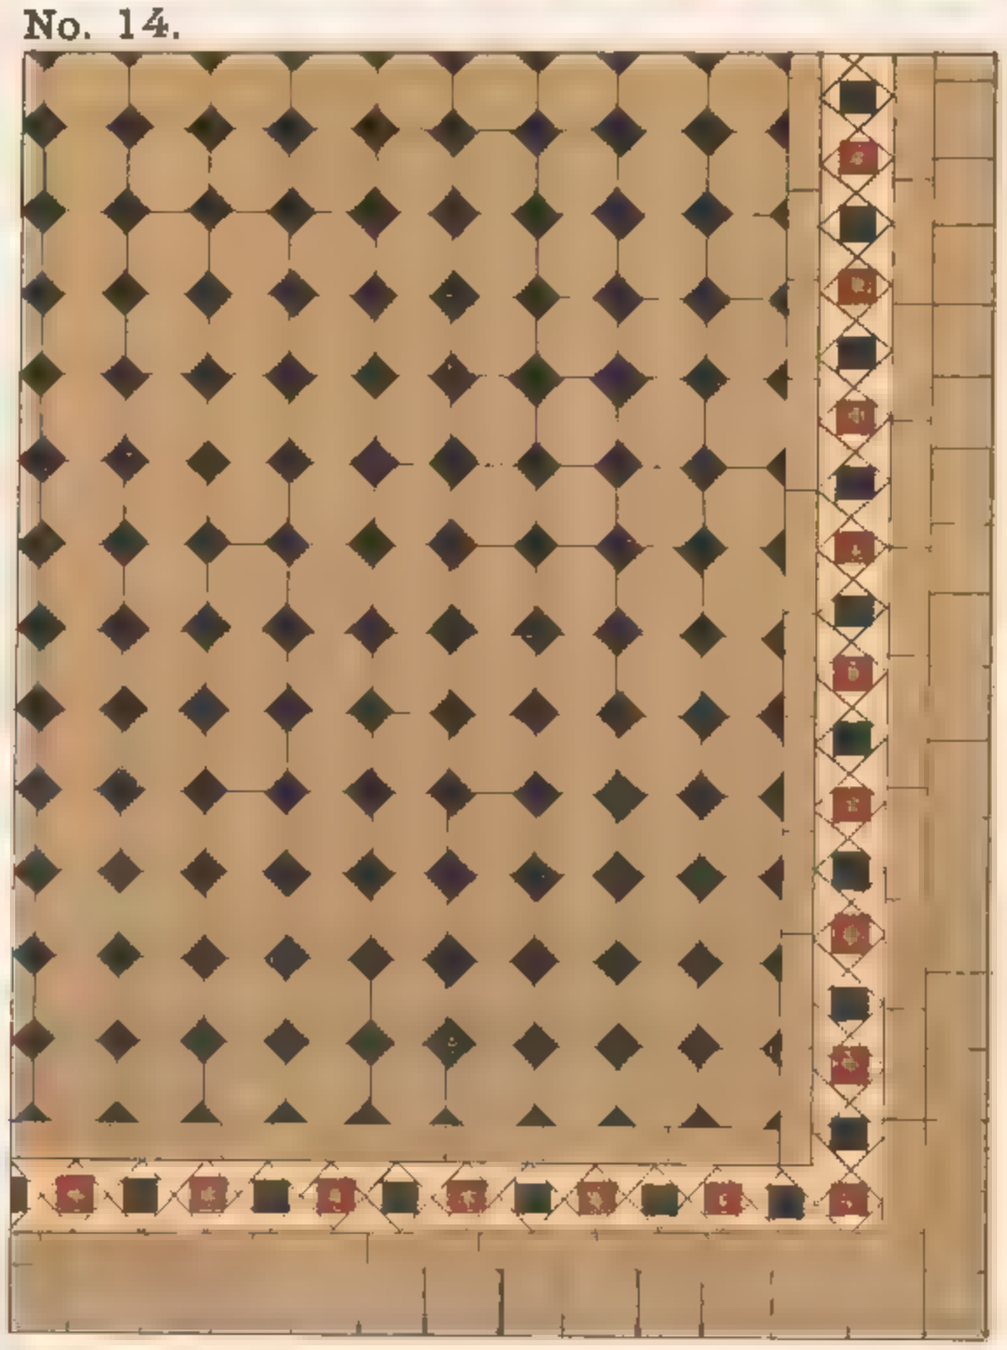

SANDS & McDOUGALL LIMITED MELB

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

No. 15.

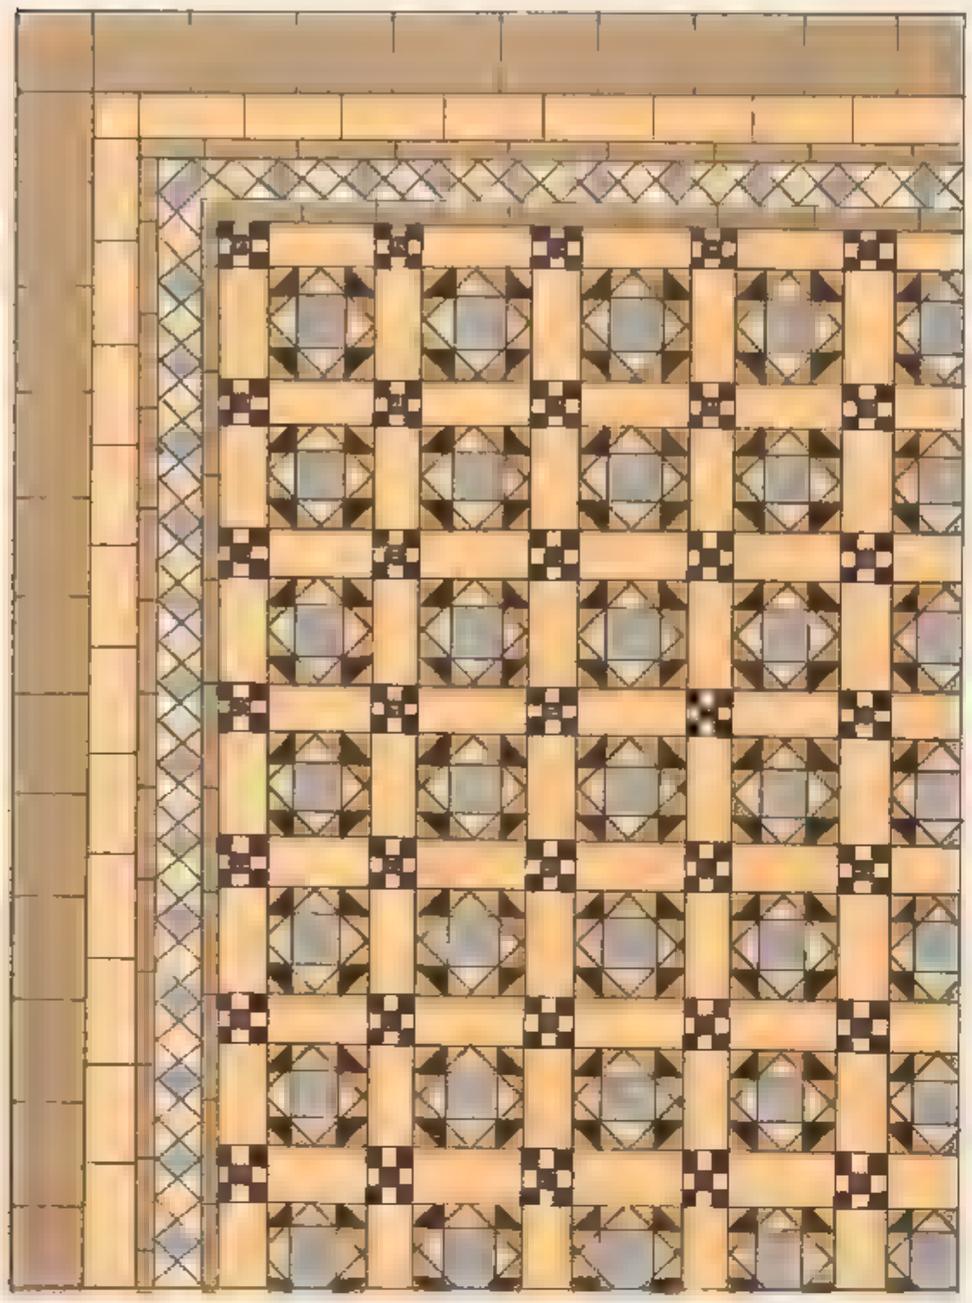

No. 16.

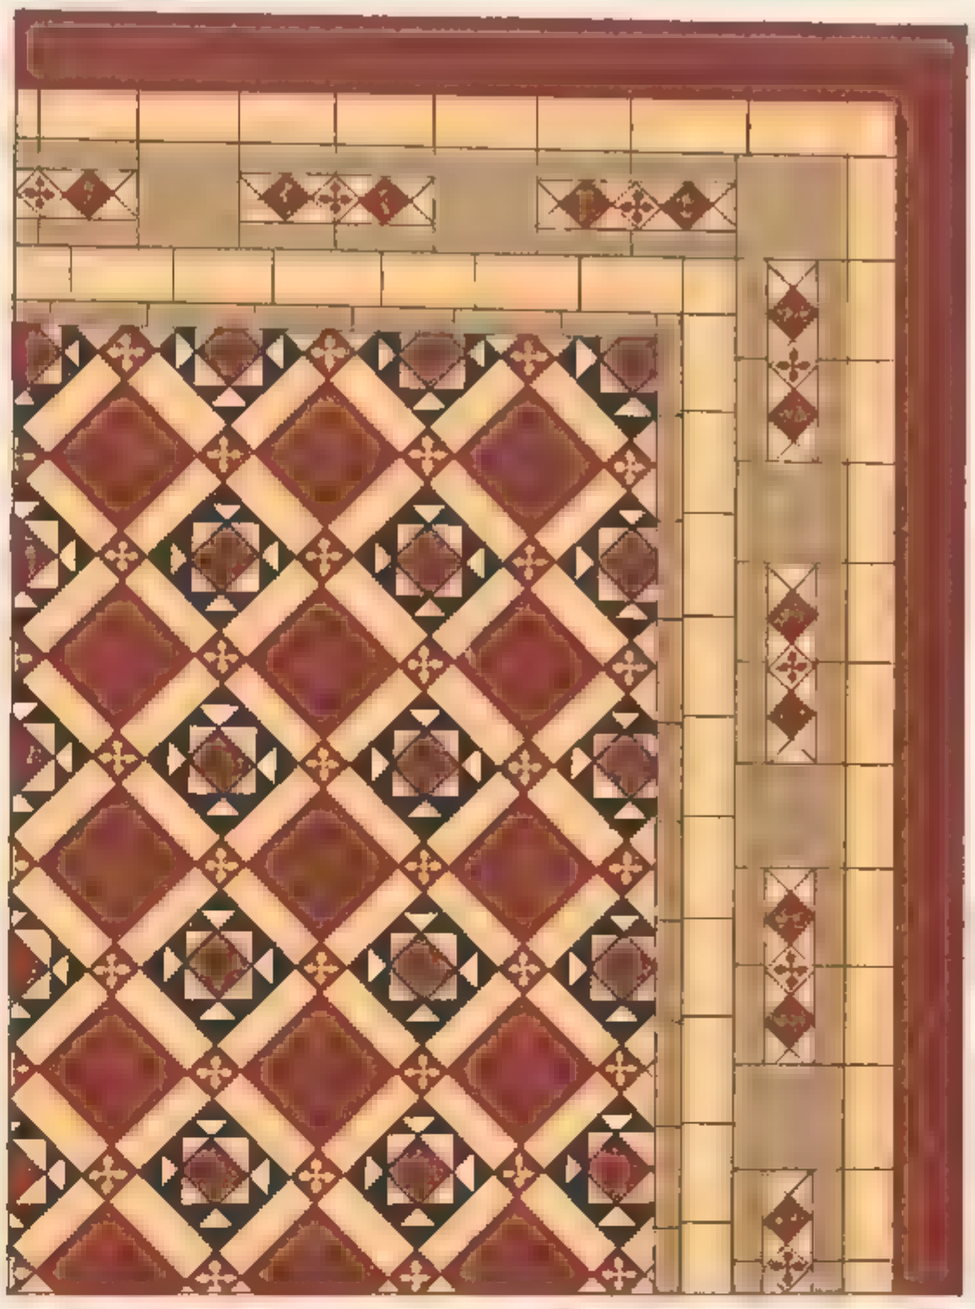

No. 17.

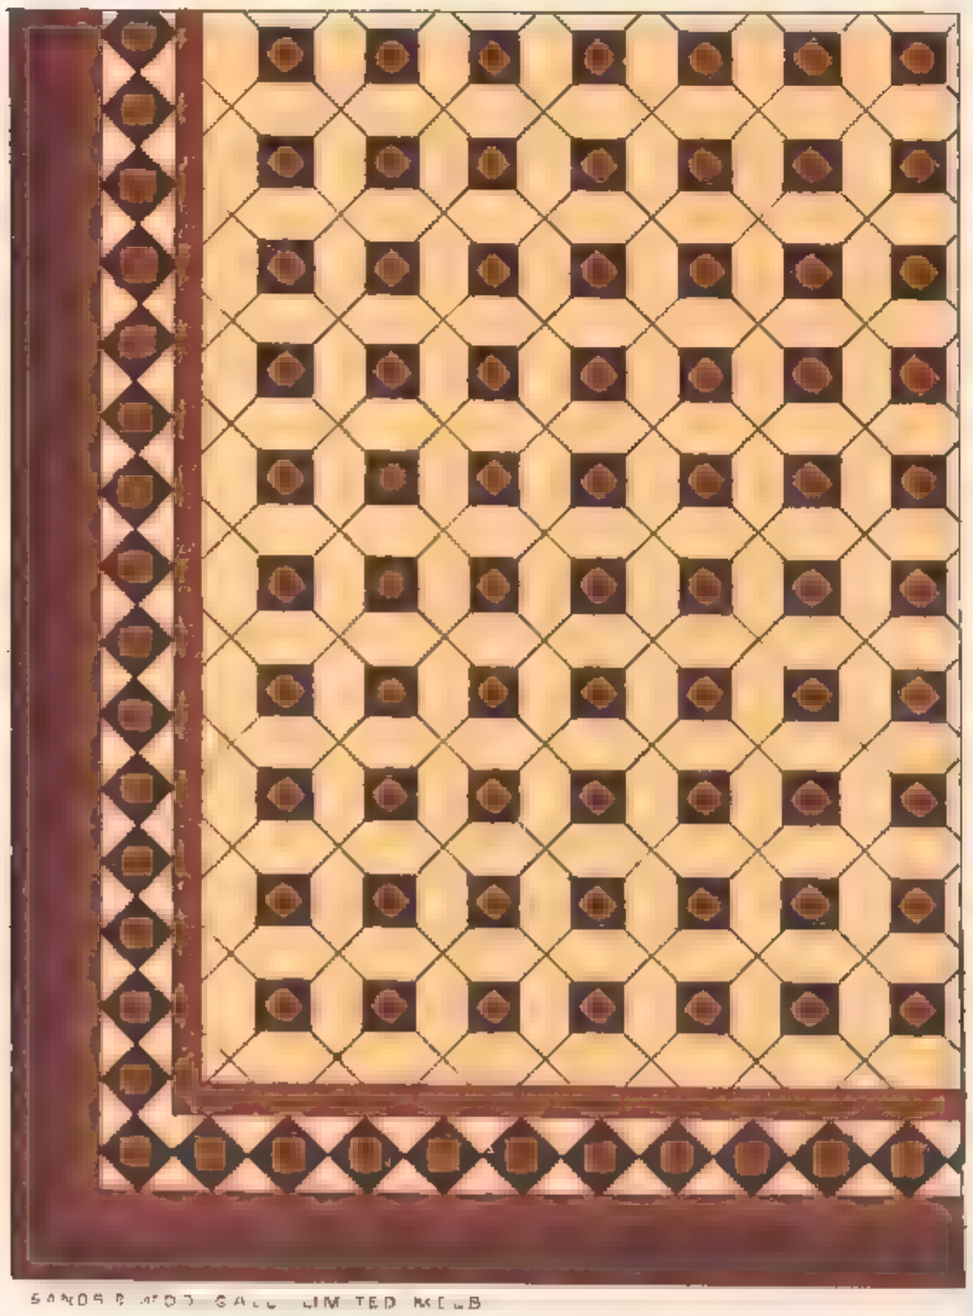

No. 18.

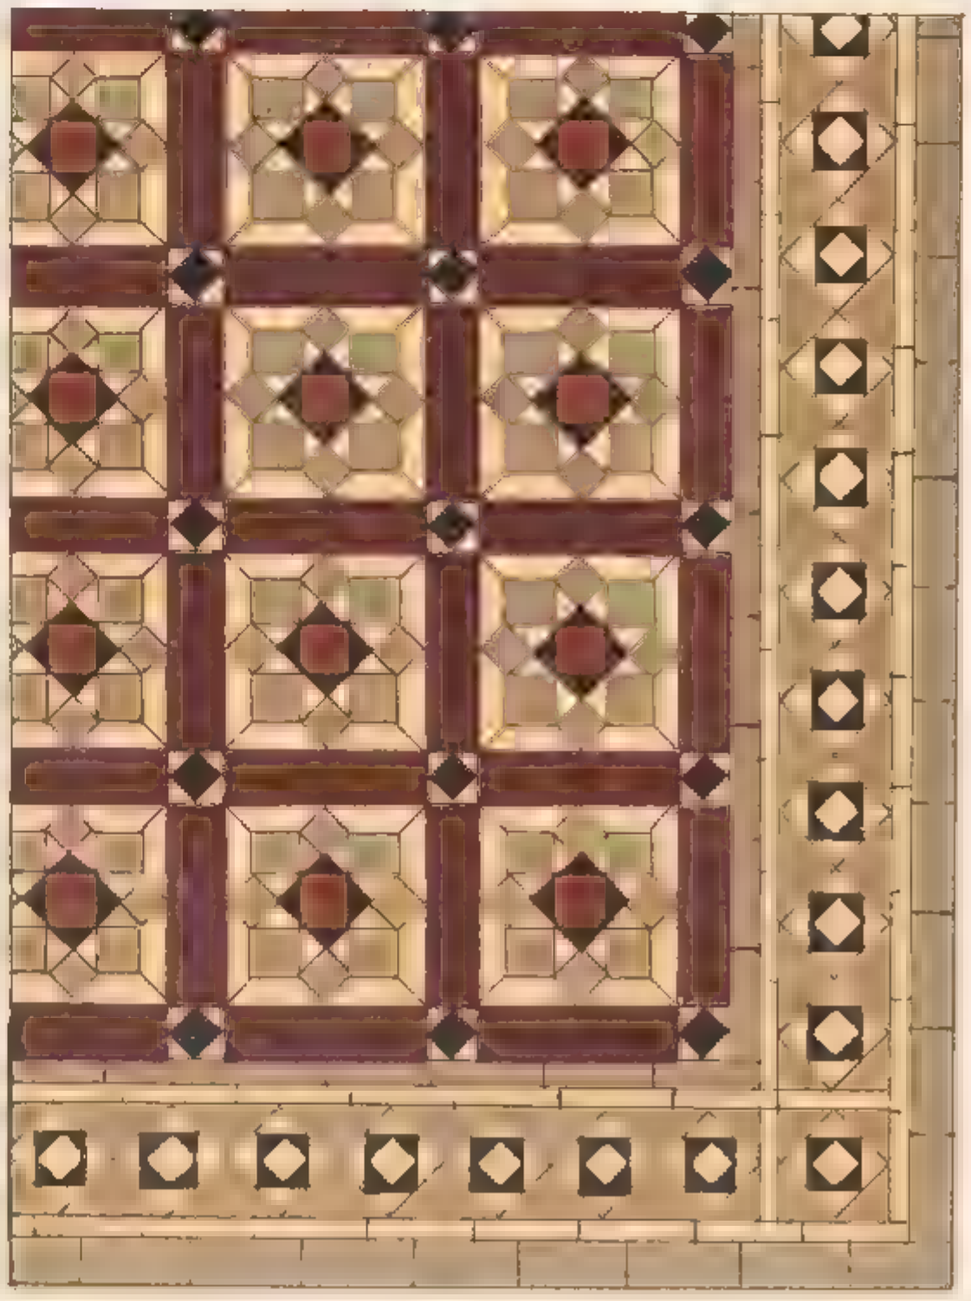

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

No. 19.

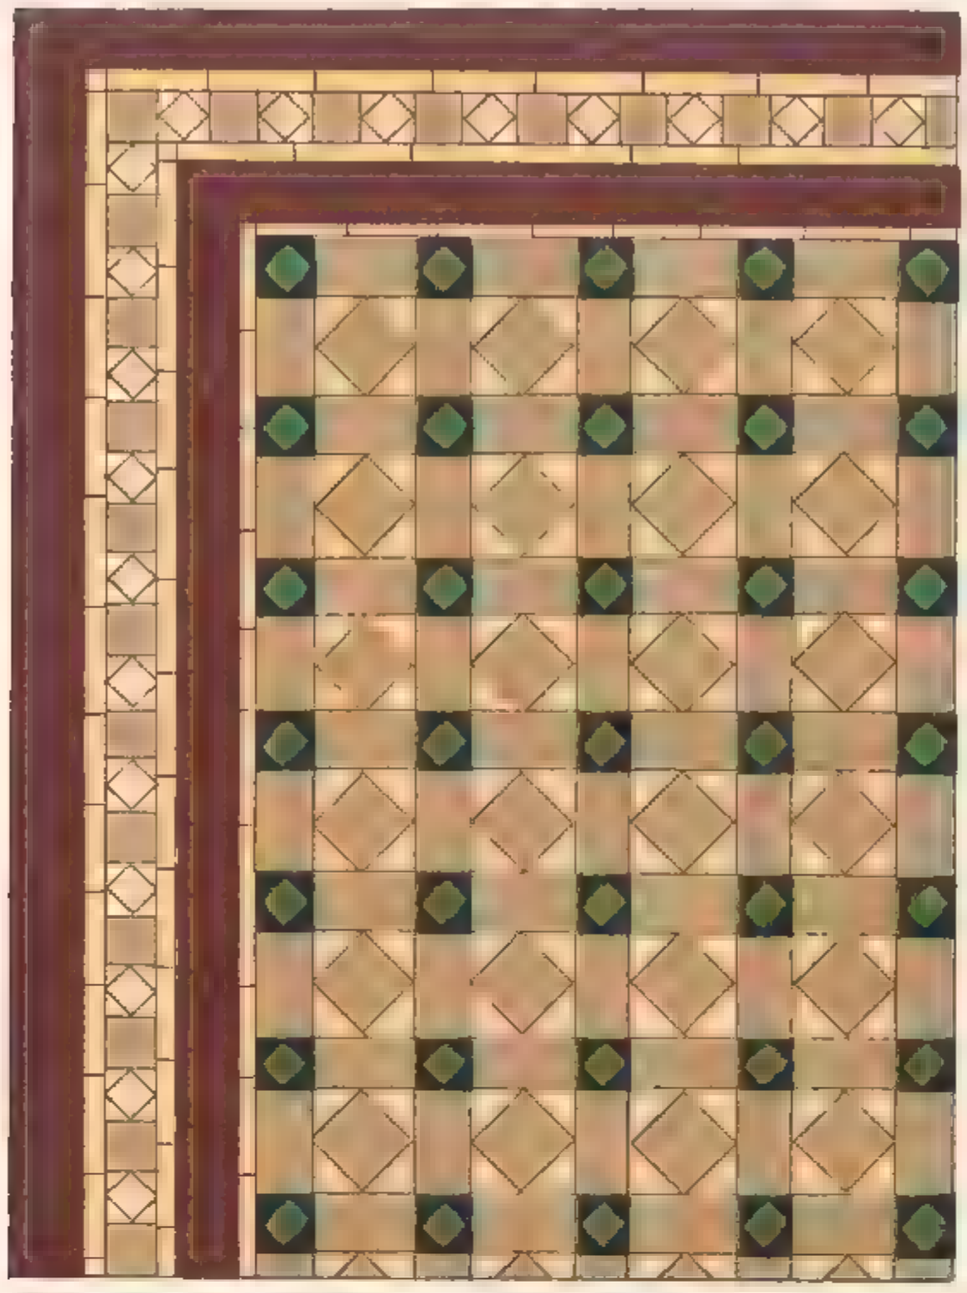

No. 20.

No. 21.

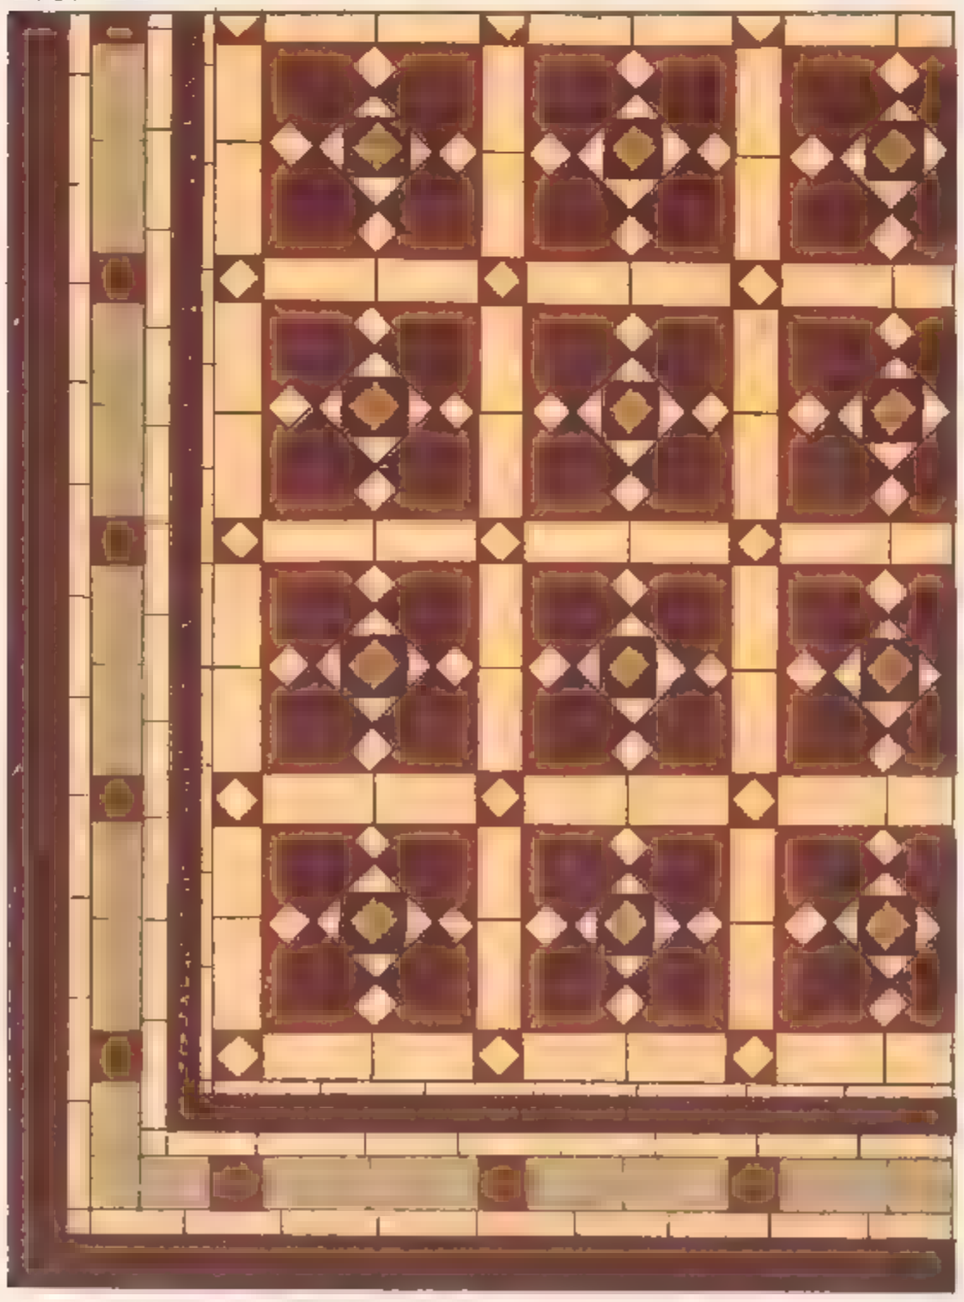

No. 22.

SANDS & McDOUGALL LIMITED MELB

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

No. 23.

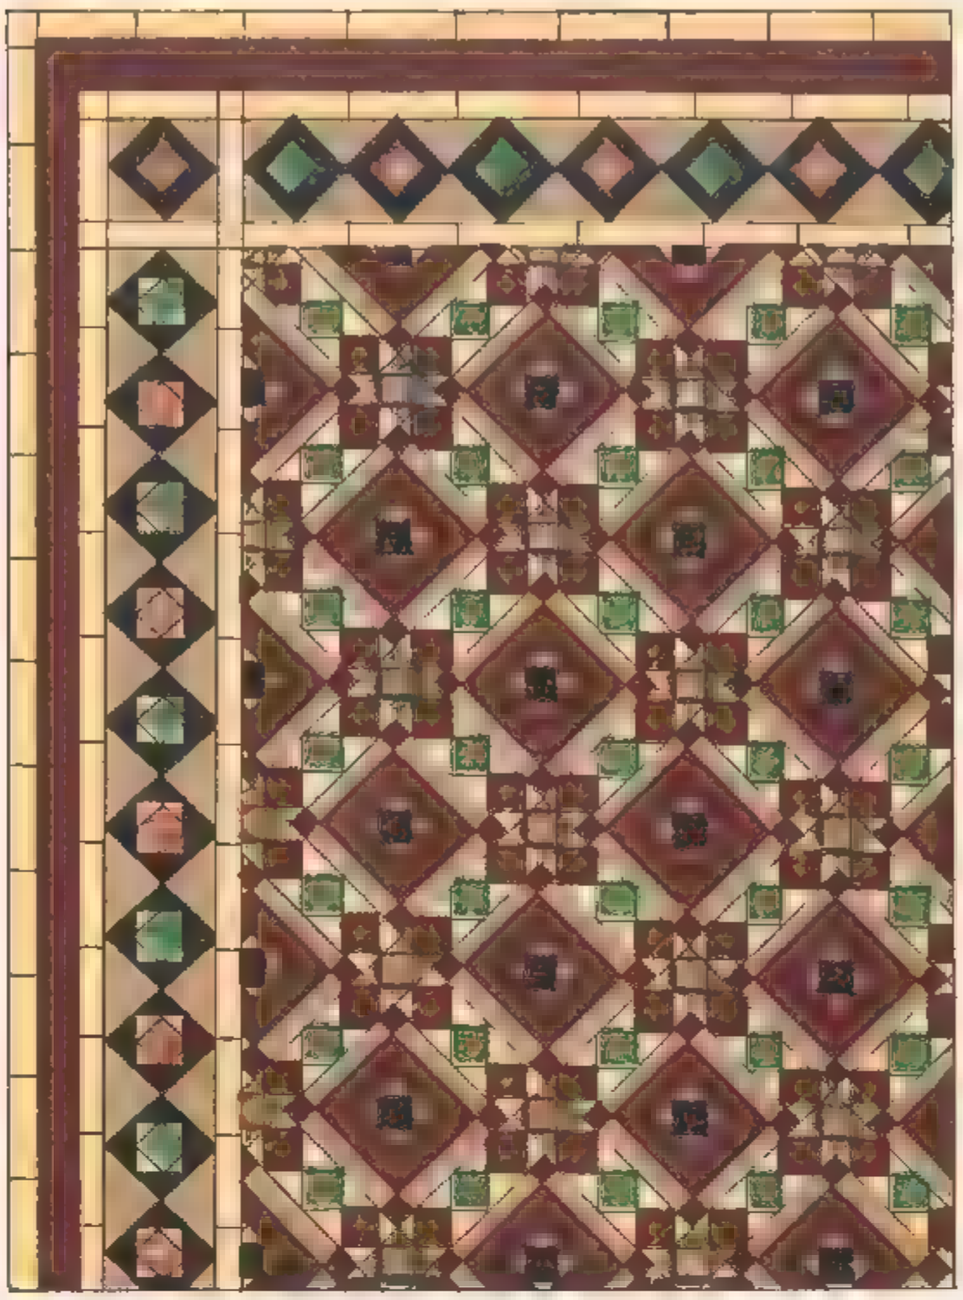

No. 24.

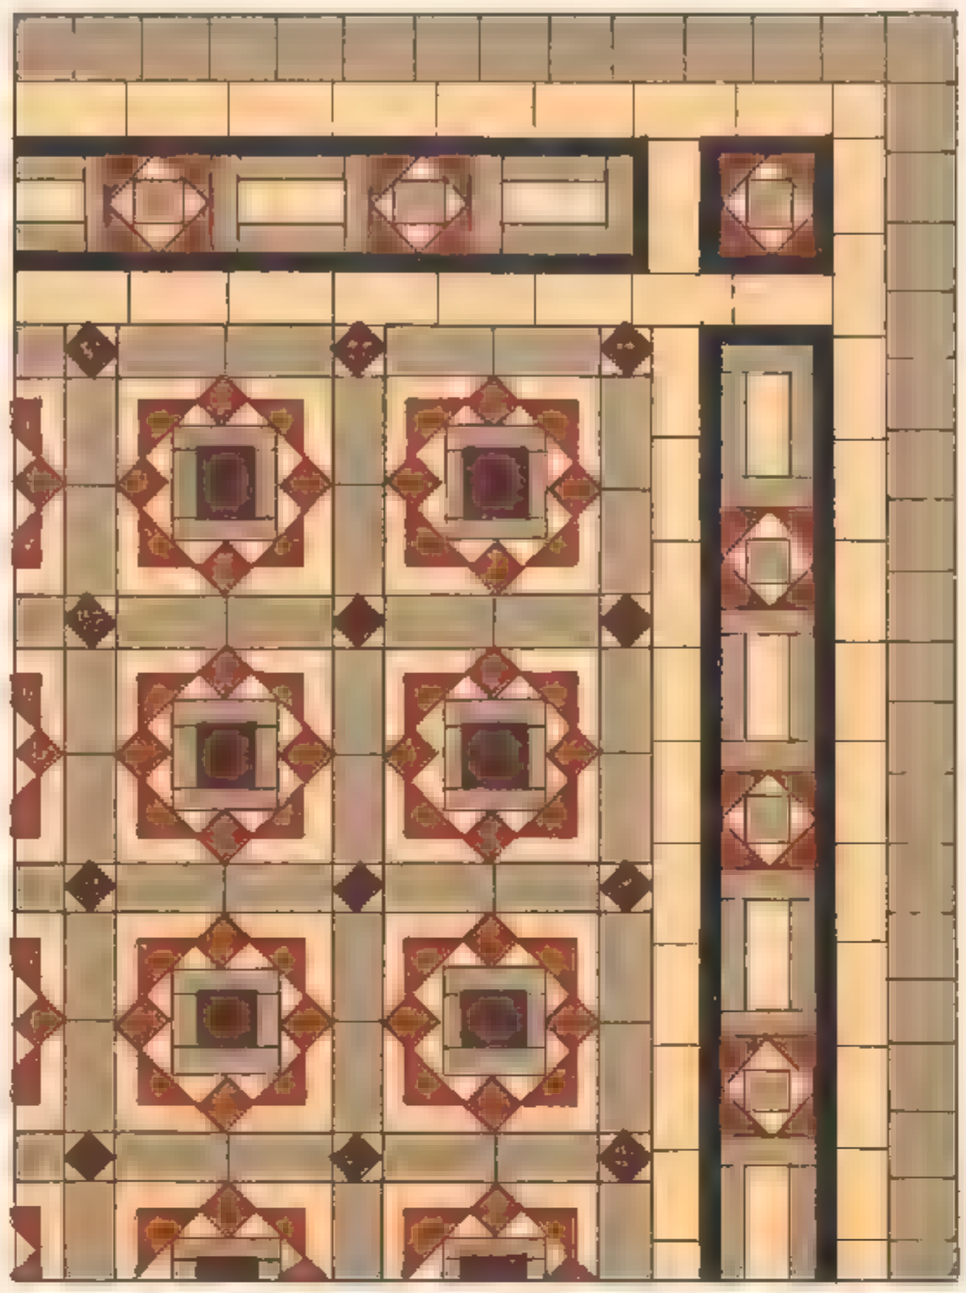

No. 25.

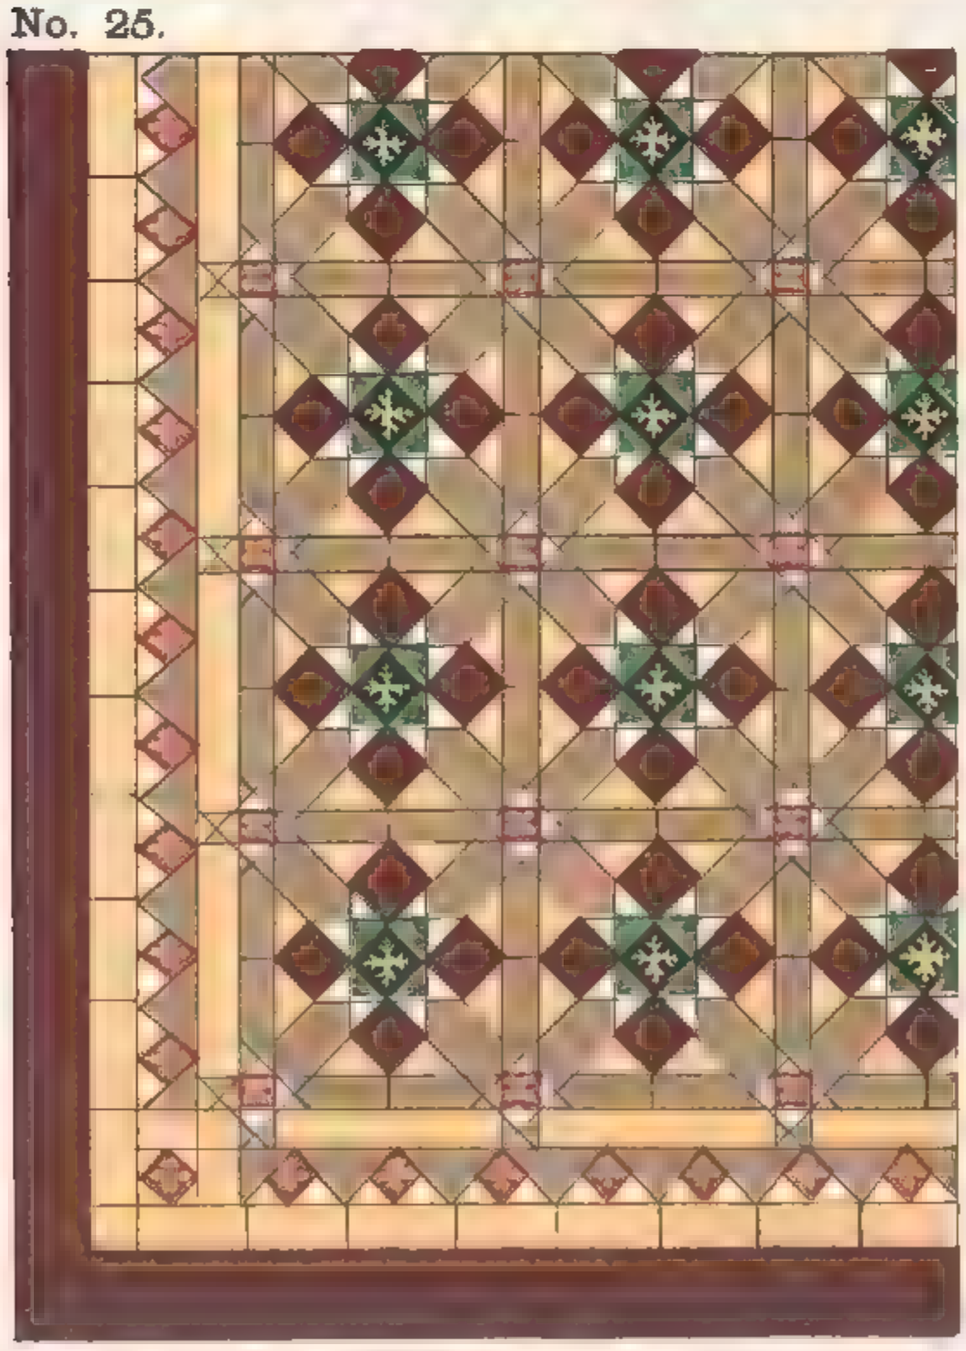

No. 26.

SANDS & McDOUGALL LIMITED MELB

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

PROPRIETARY

MITCHAM VICTORIA

No. 27.

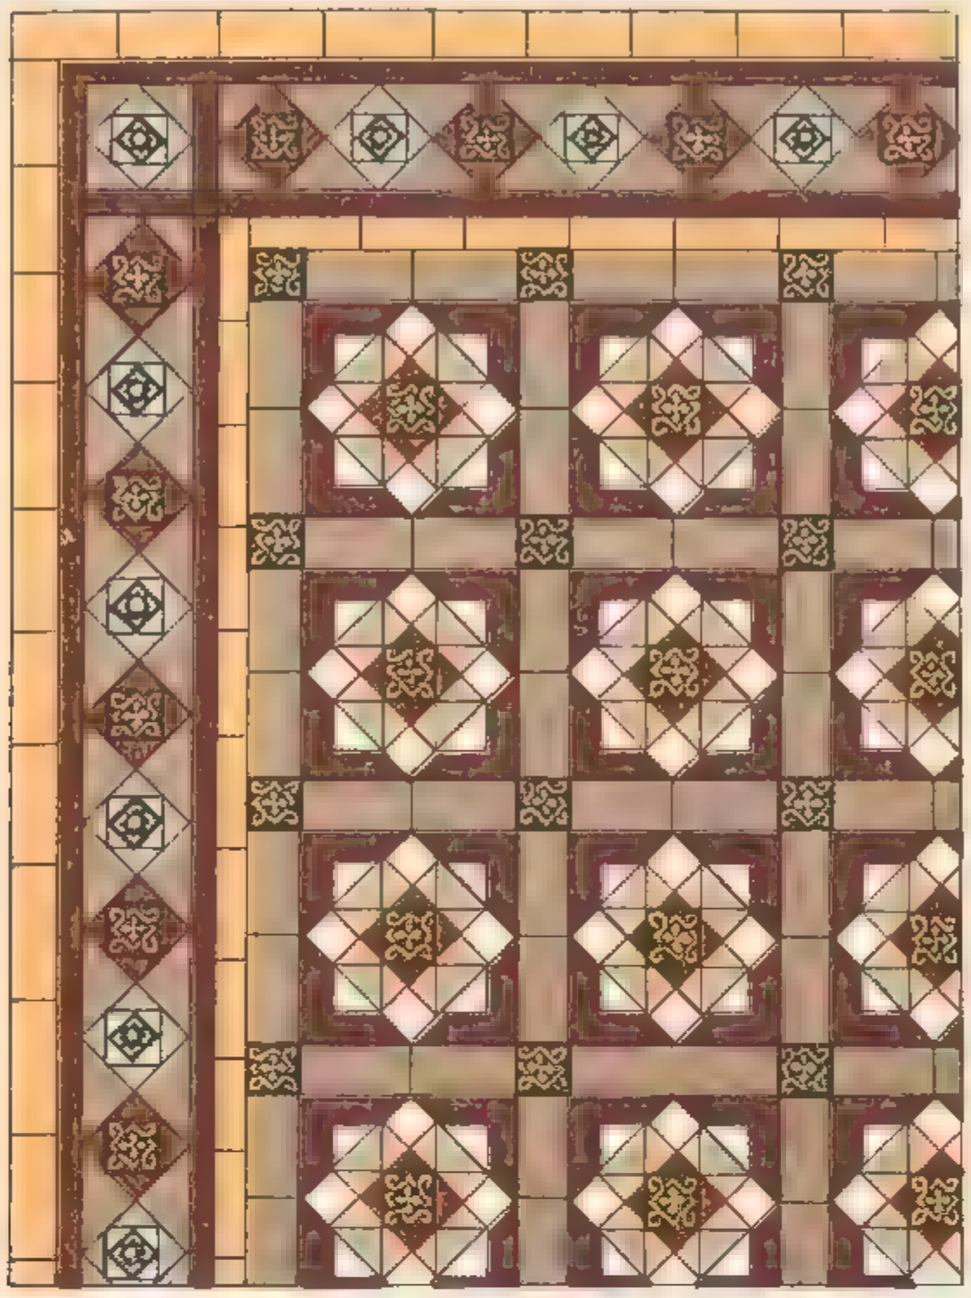

No. 28.

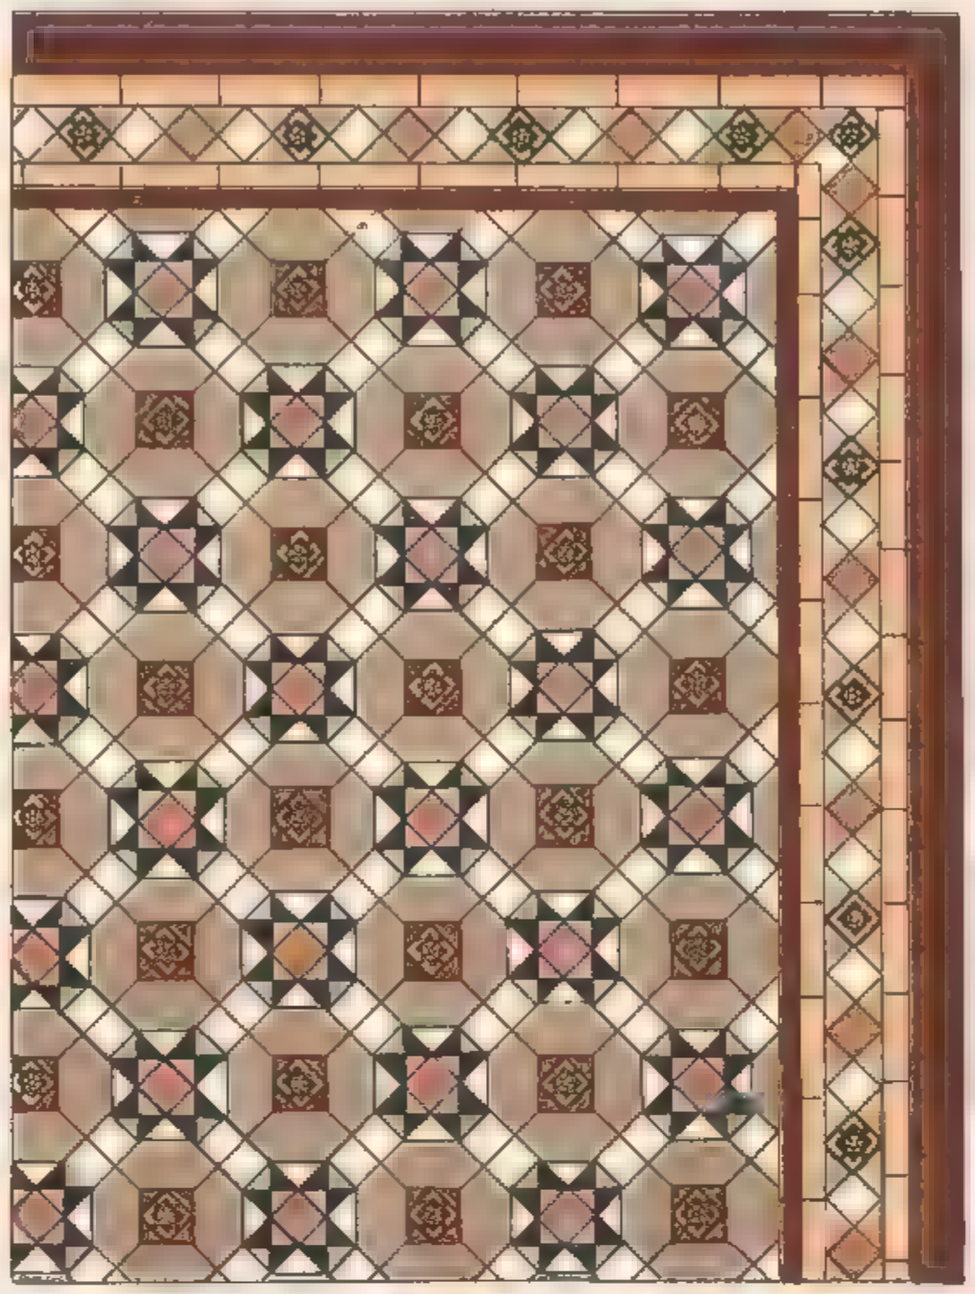

No. 29.

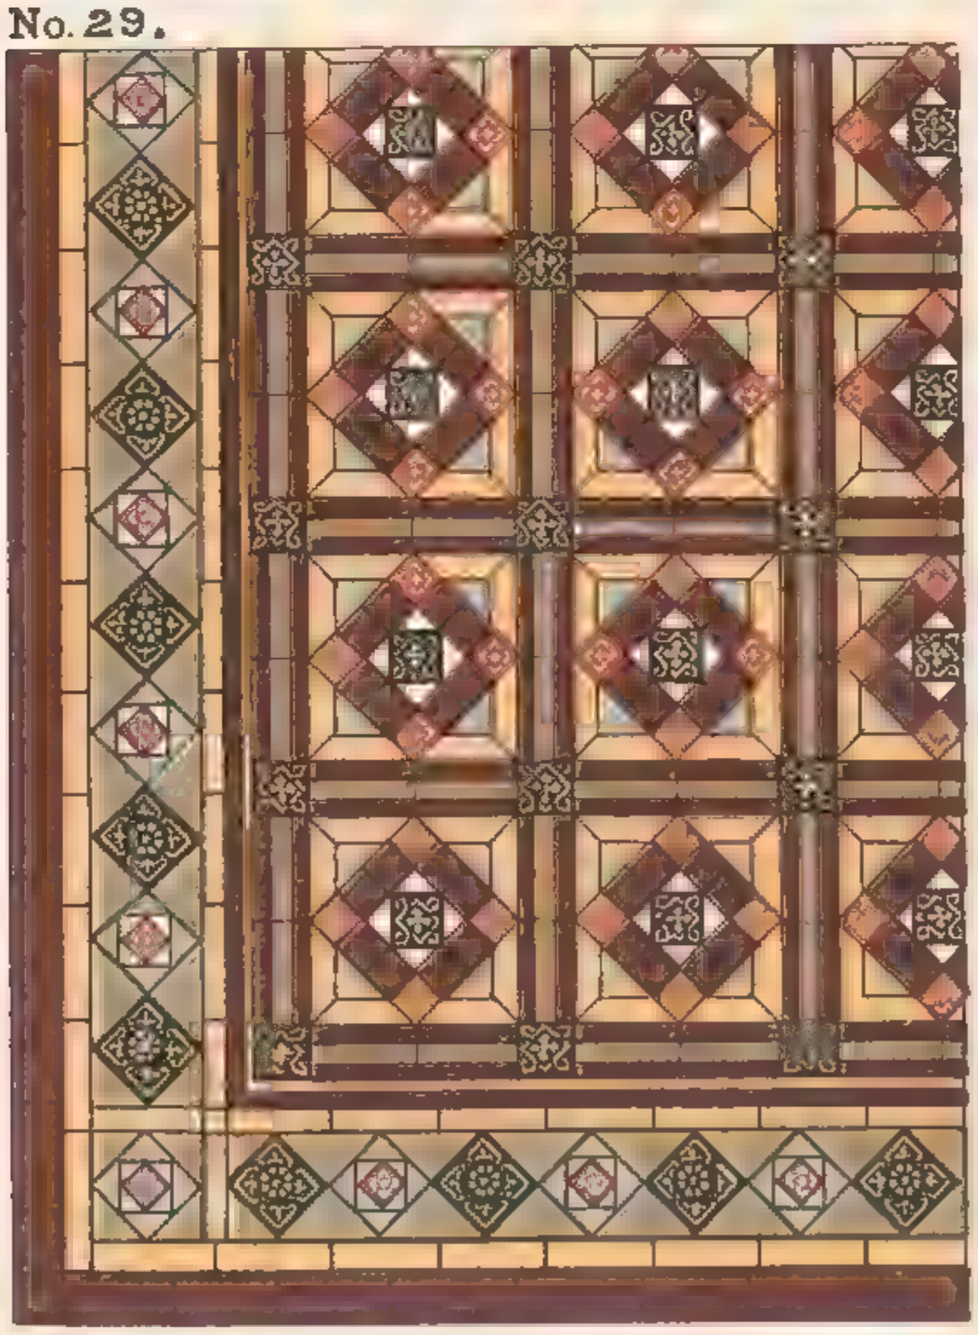

No 30.

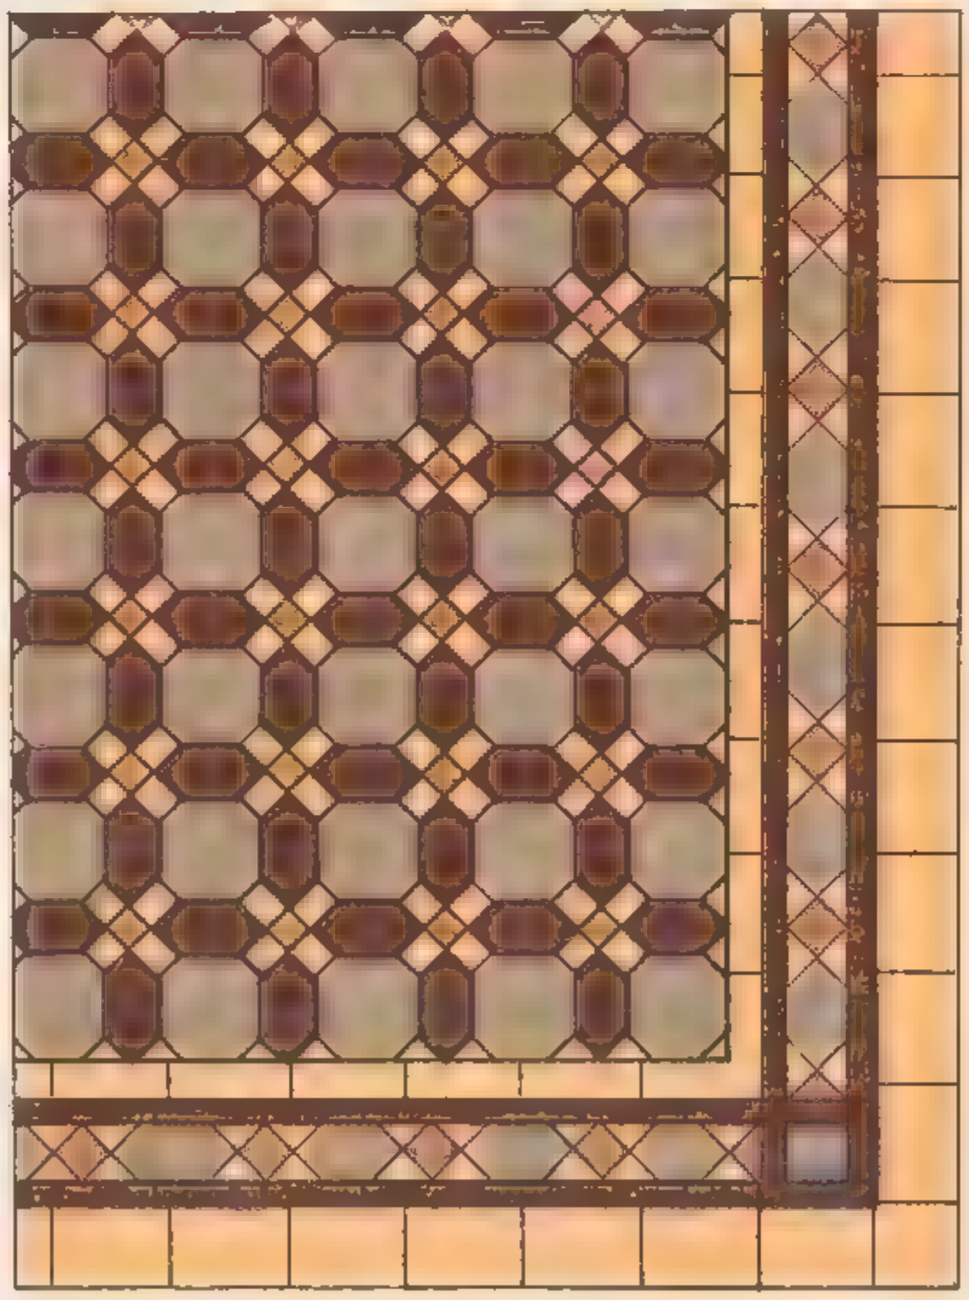

SANDS & McDOUGALL LIMITED, MELB

COPYRIGHT

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

EXPEDITARY

No. 31.

No 32.

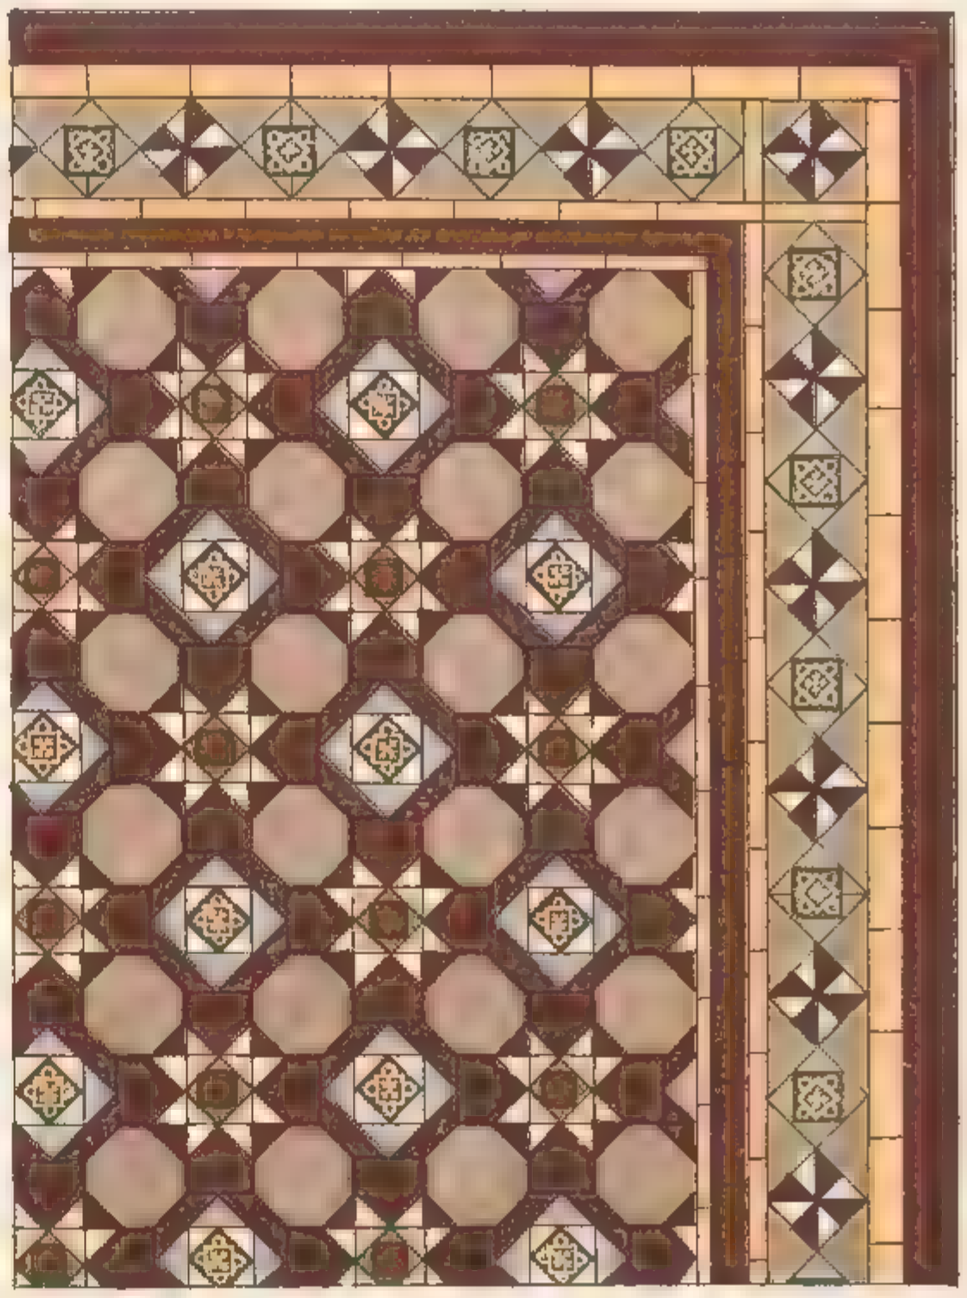

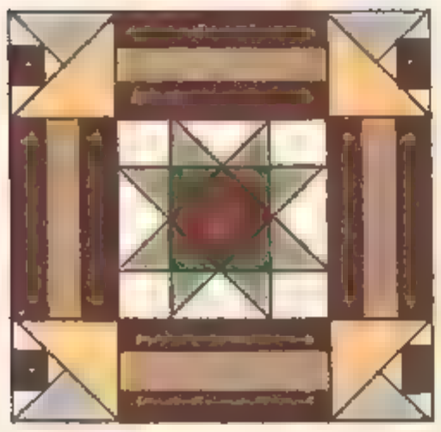

No. 33.

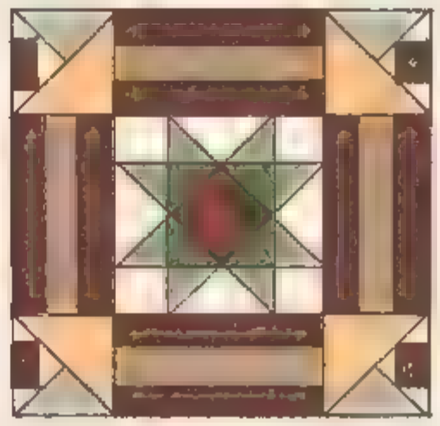

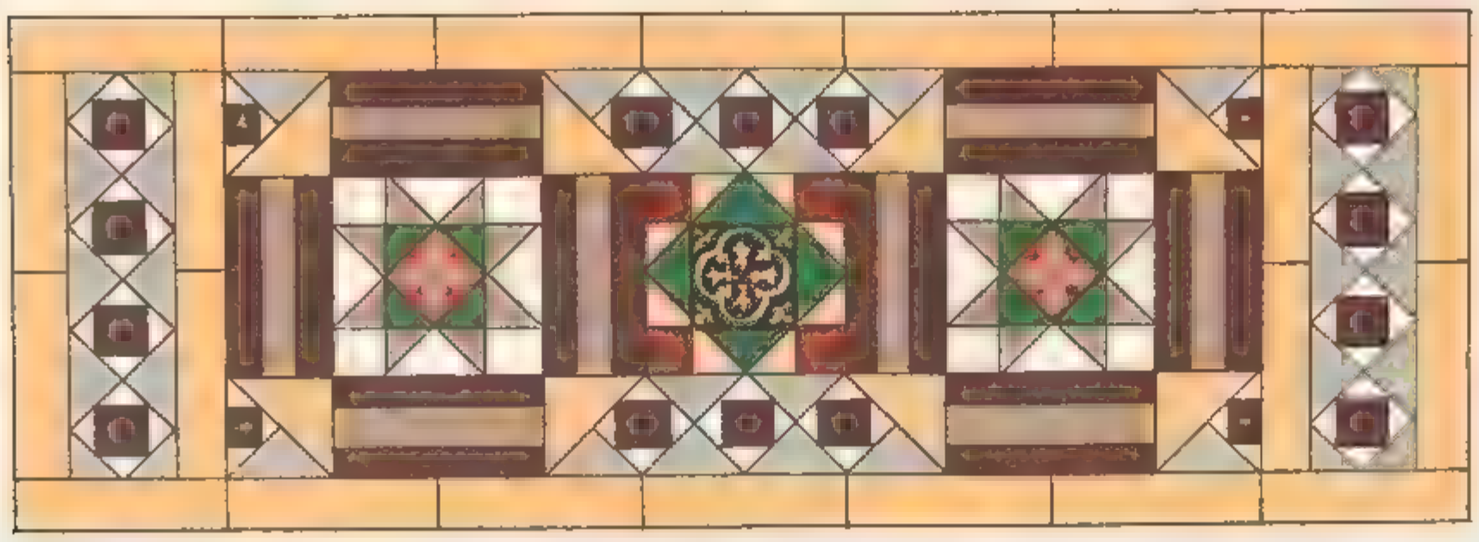

SANDS & McDOUGALL LIMITED MELB

SCALE, ¾ INCH TO A FOOT.

REGISTERED COPYRIGHT

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

SECRETARY

No. 34.

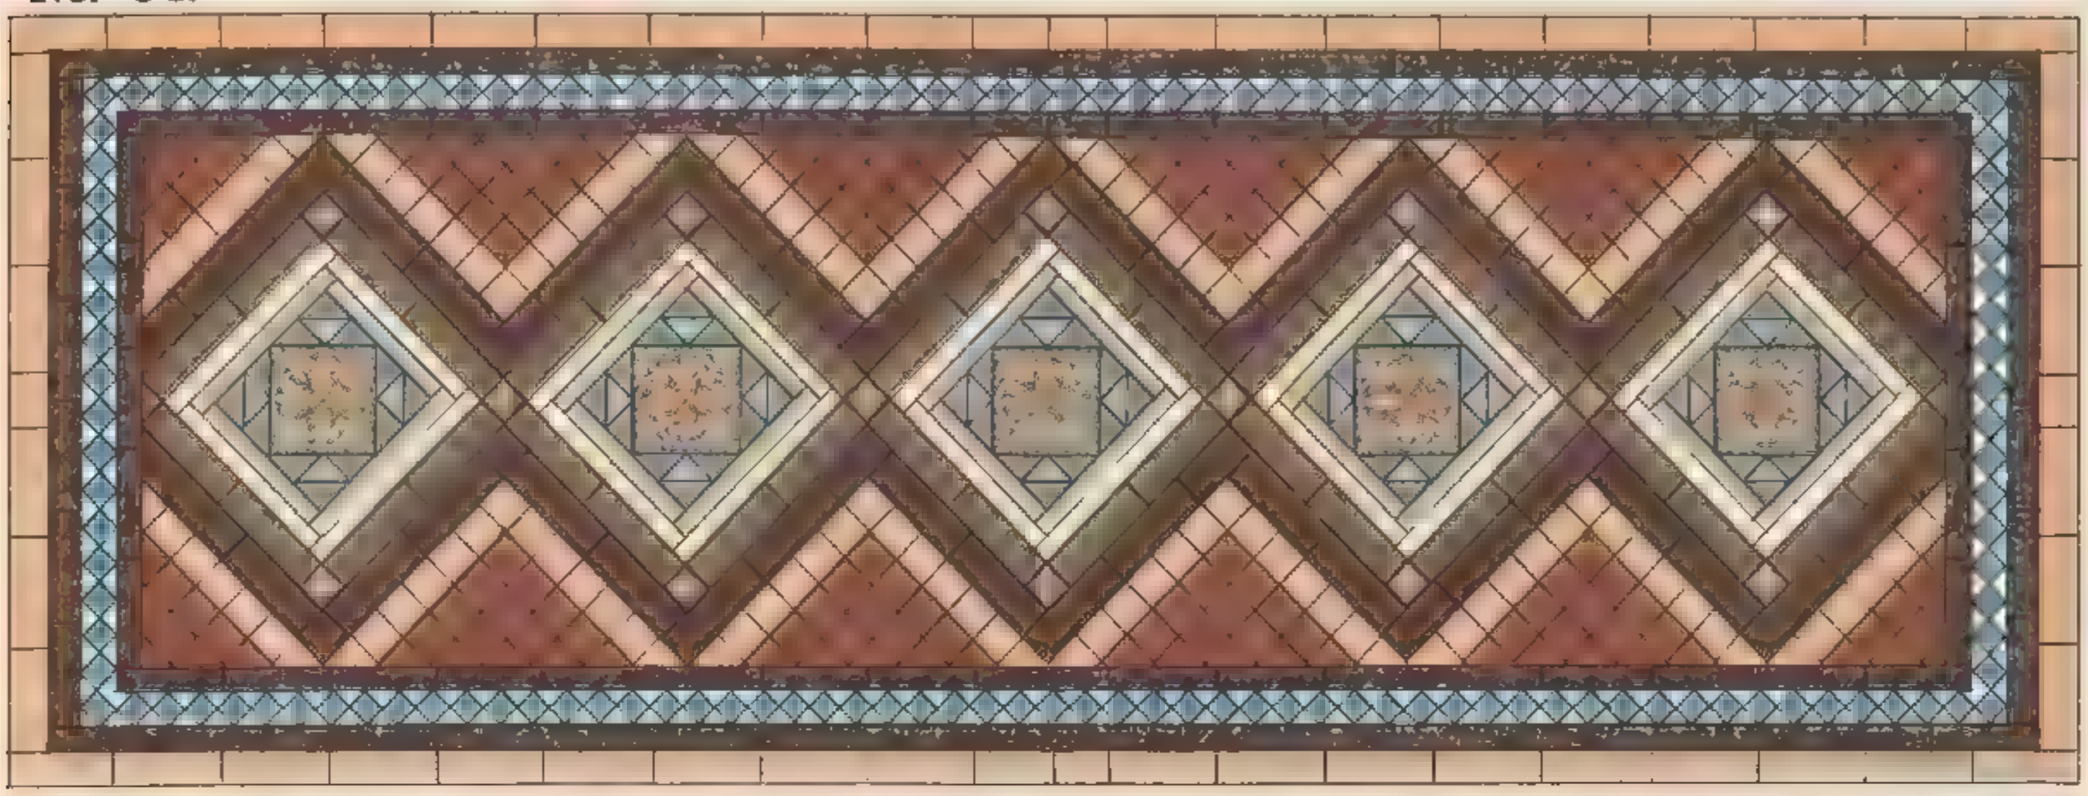

No. 35.

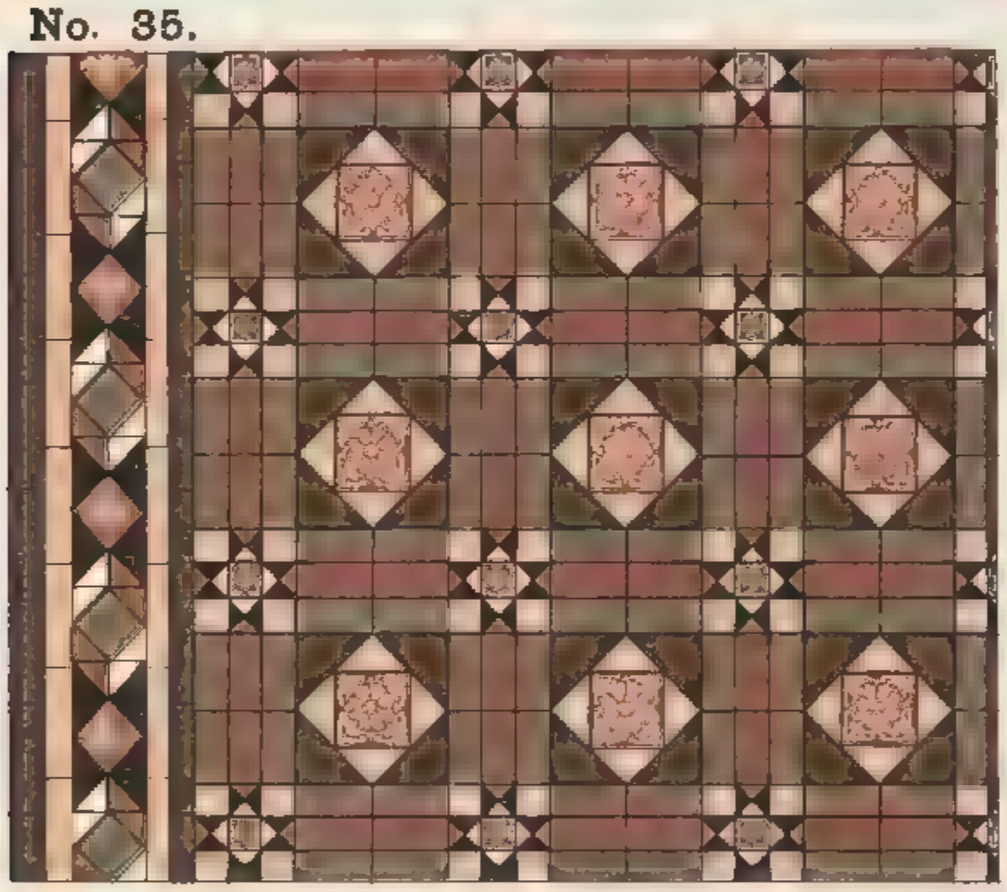

No. 36.

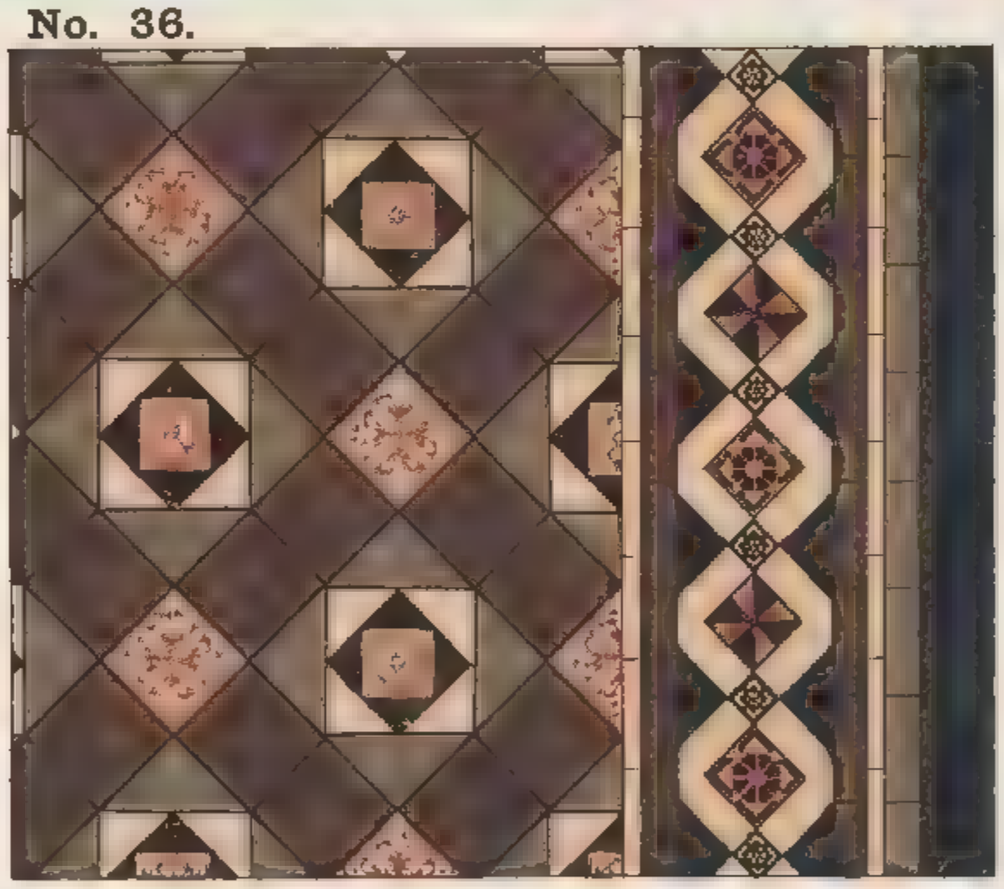

No. 37.

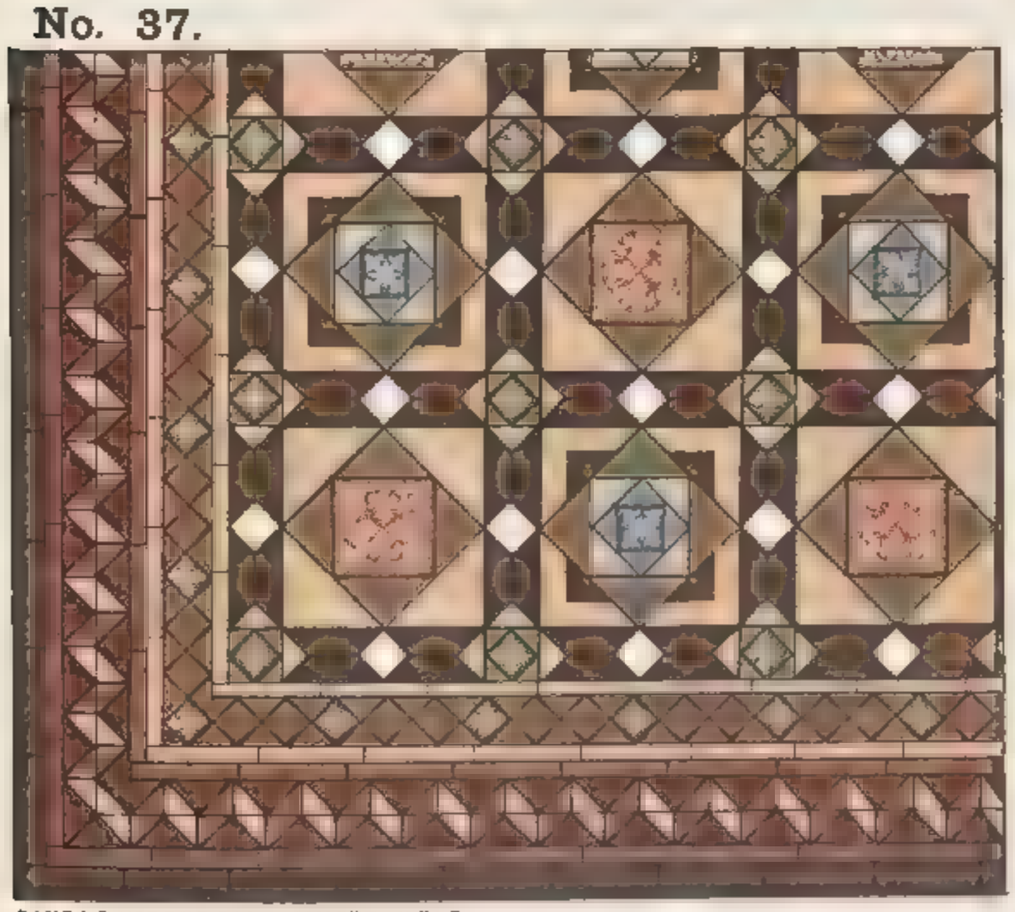

No. 38.

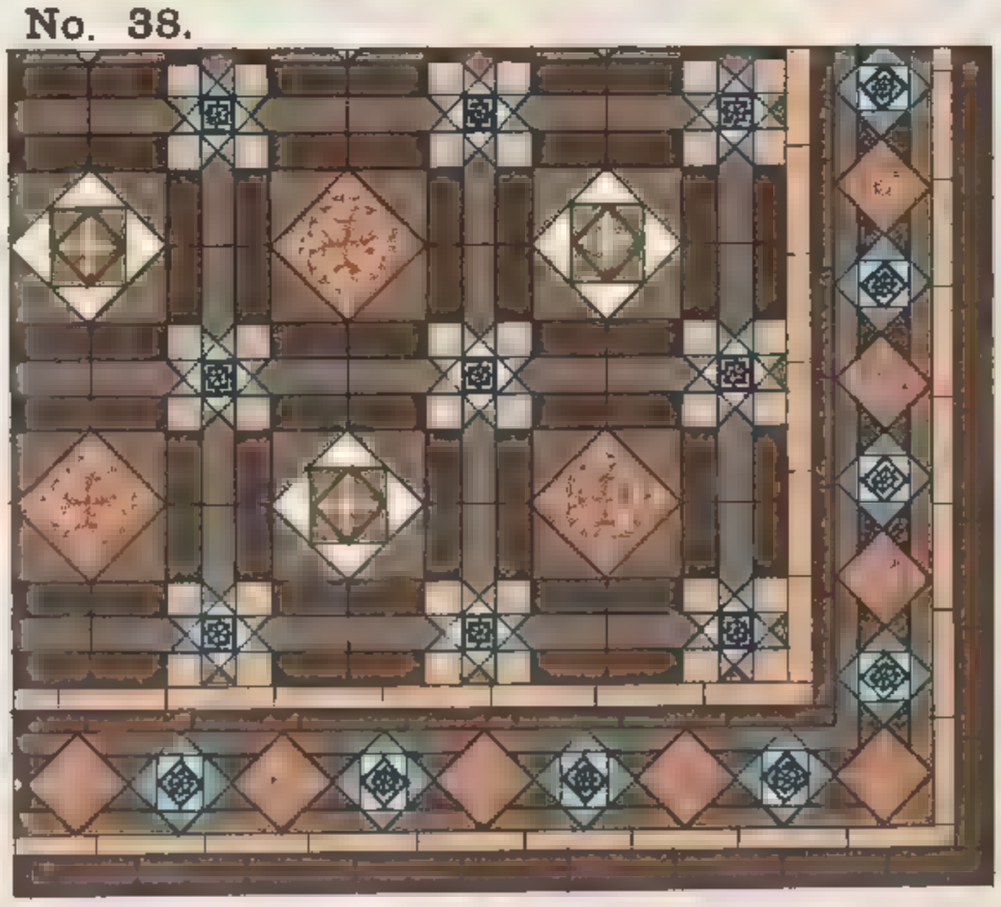

SANDS & McDOUGALL LIMITED, MELB

REGISTERED COPYRIGHT

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

PROPRIETARY

No. 39.

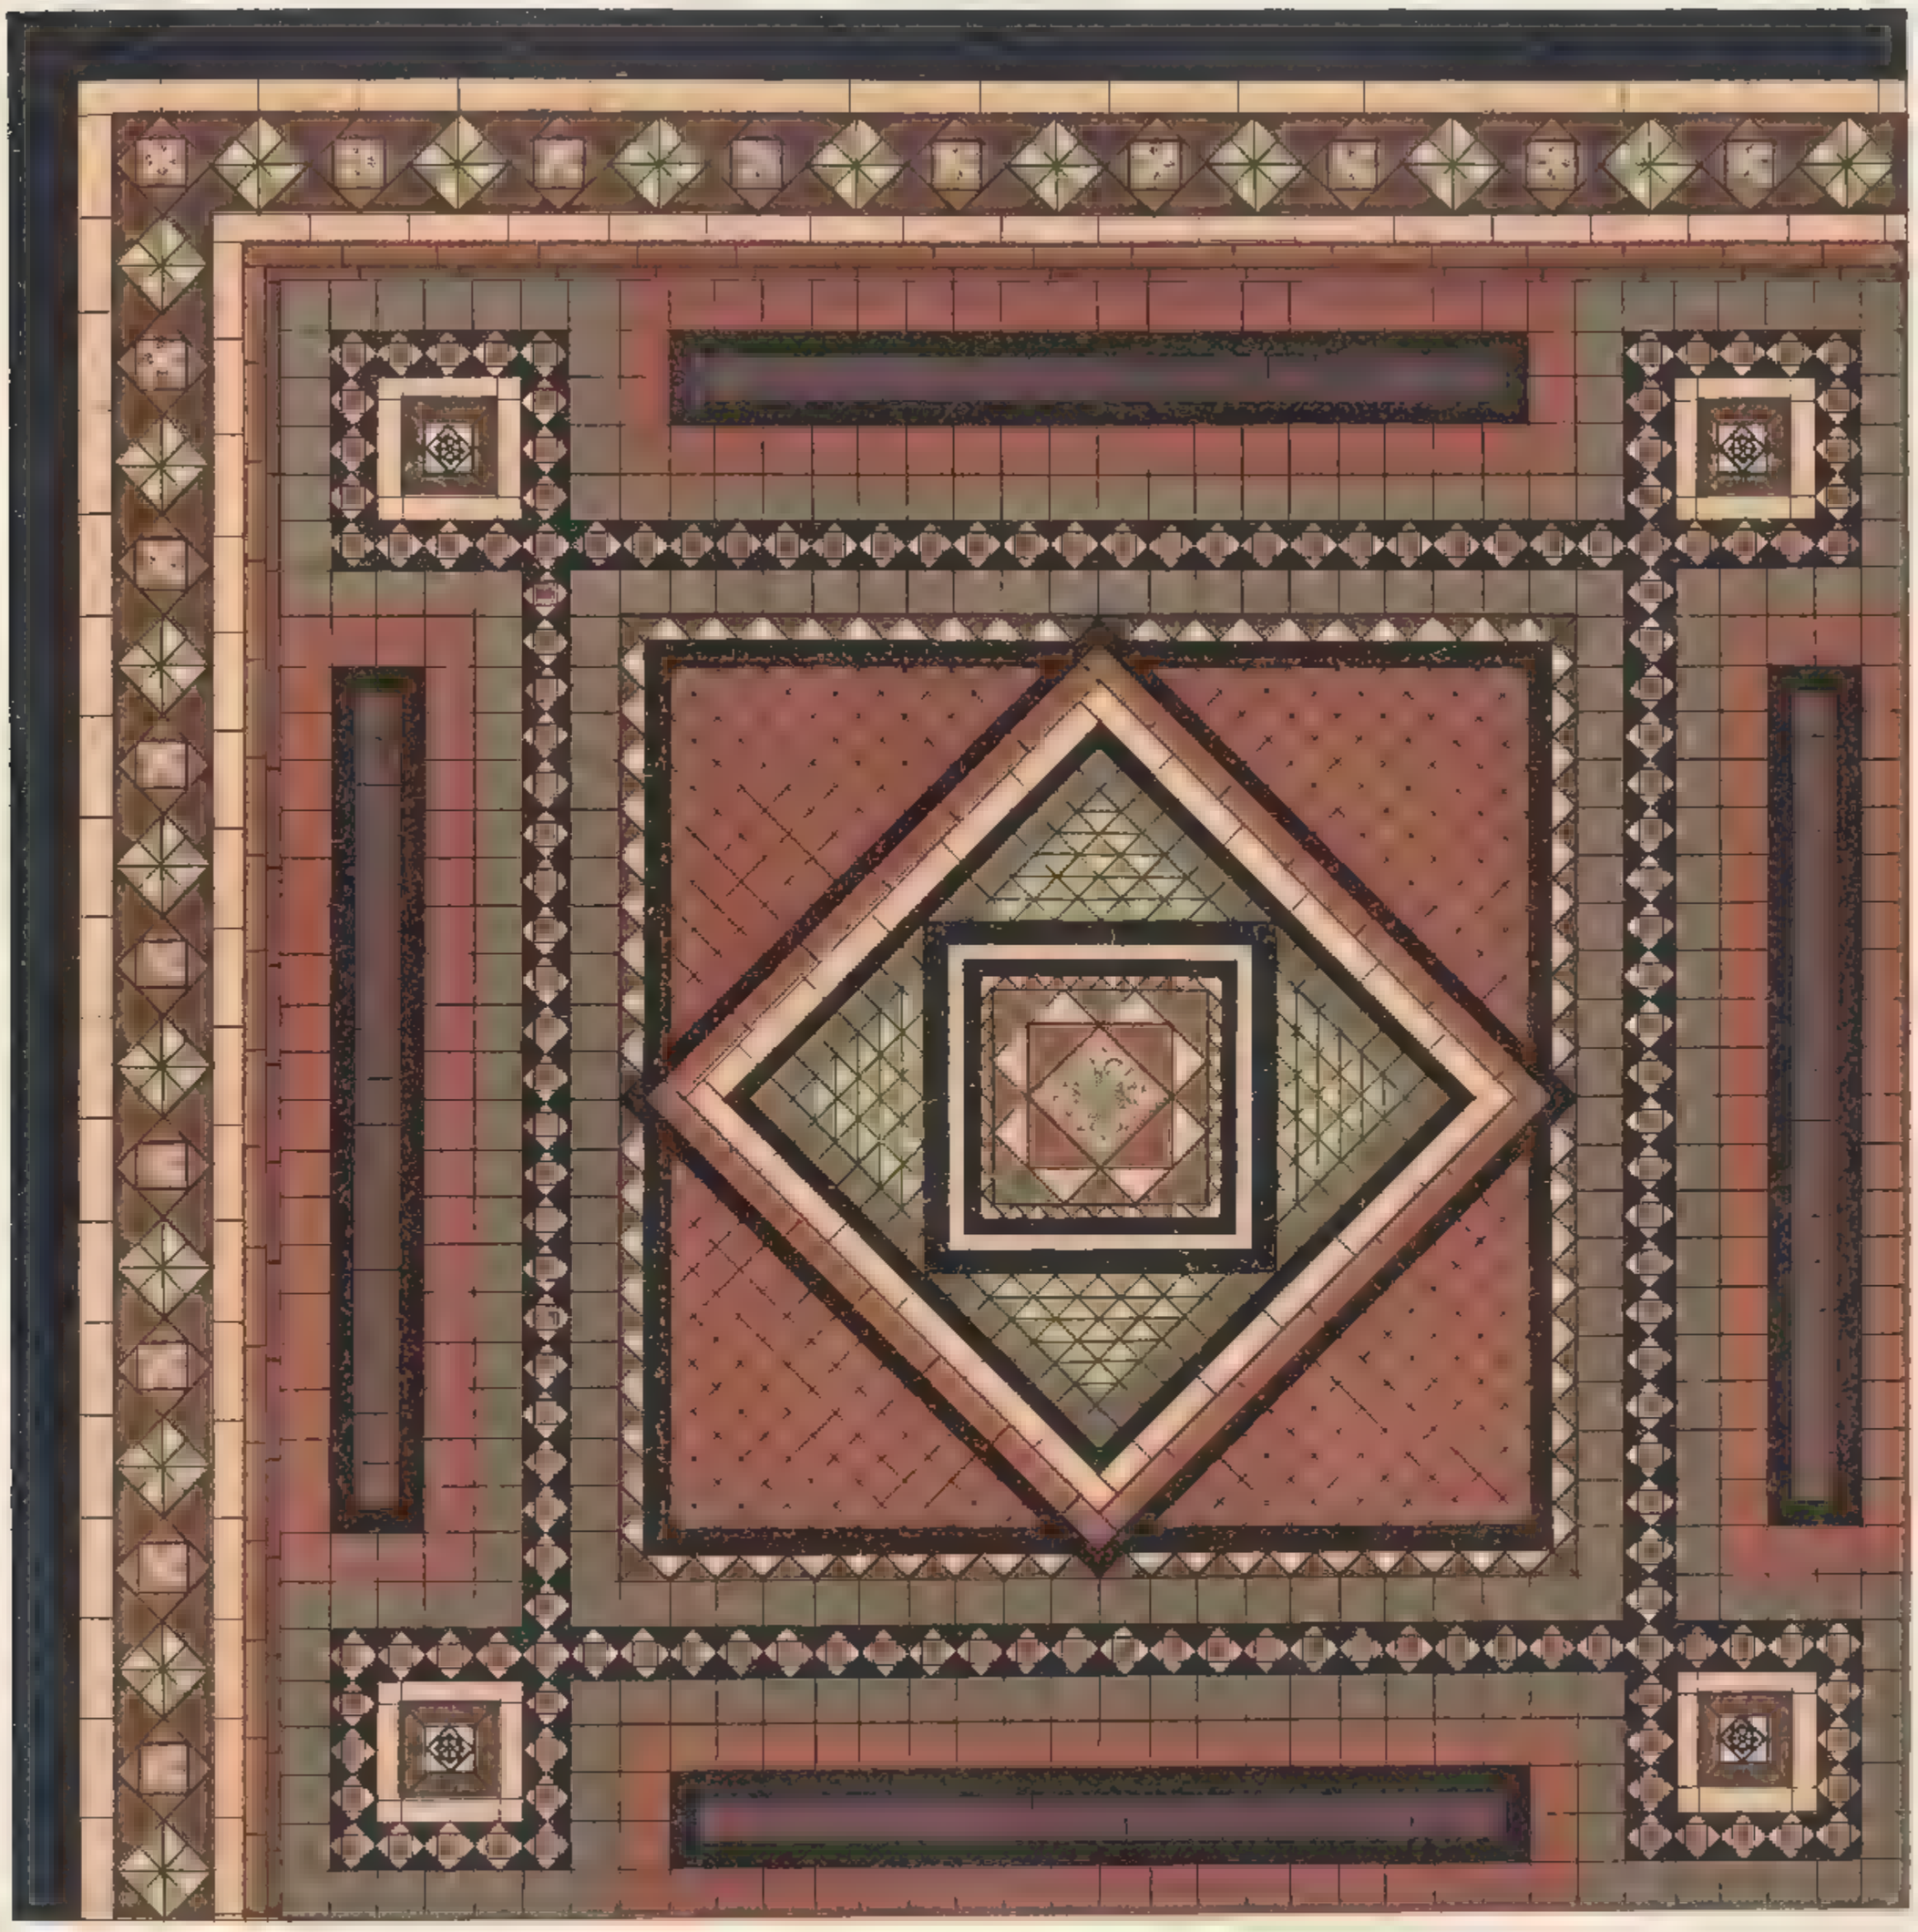

No. 40.

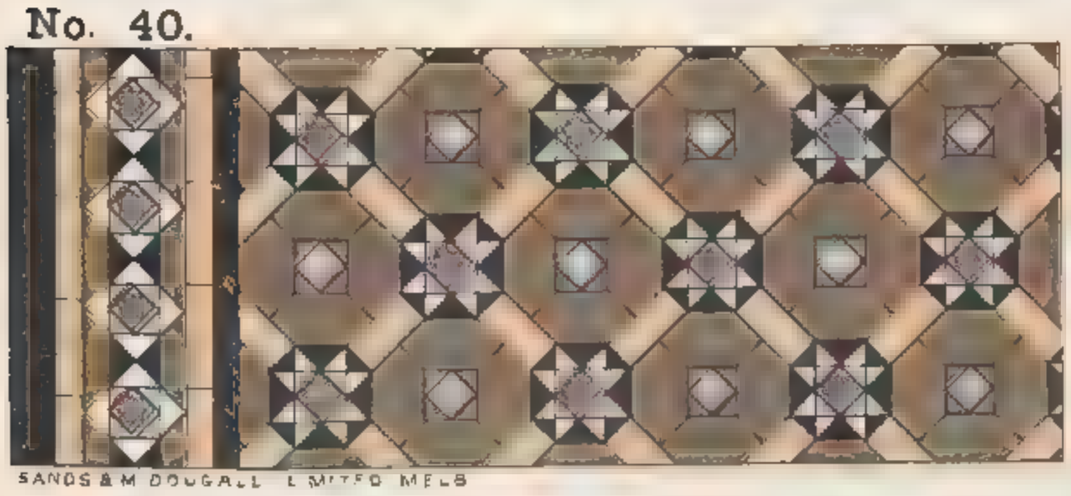

SANDS & M DOUGALL LIMITED MELB

No. 41.

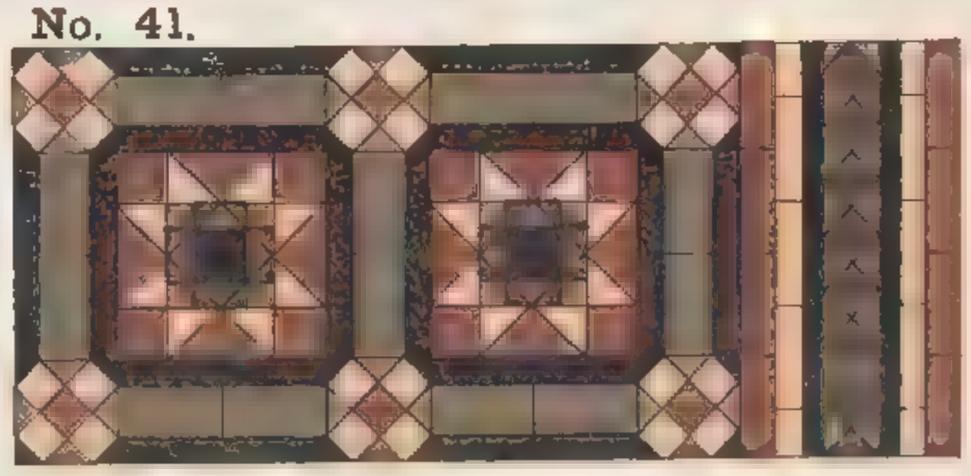

REGISTERED COPYRIGHT

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

PROPRIETARY

MITCHAM VICTORIA

No. 42.

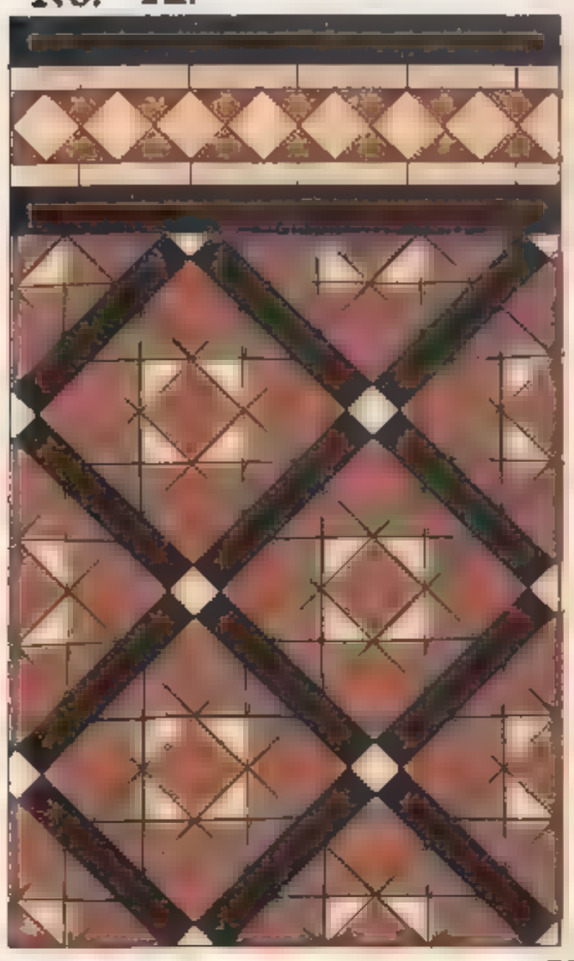

No. 43.

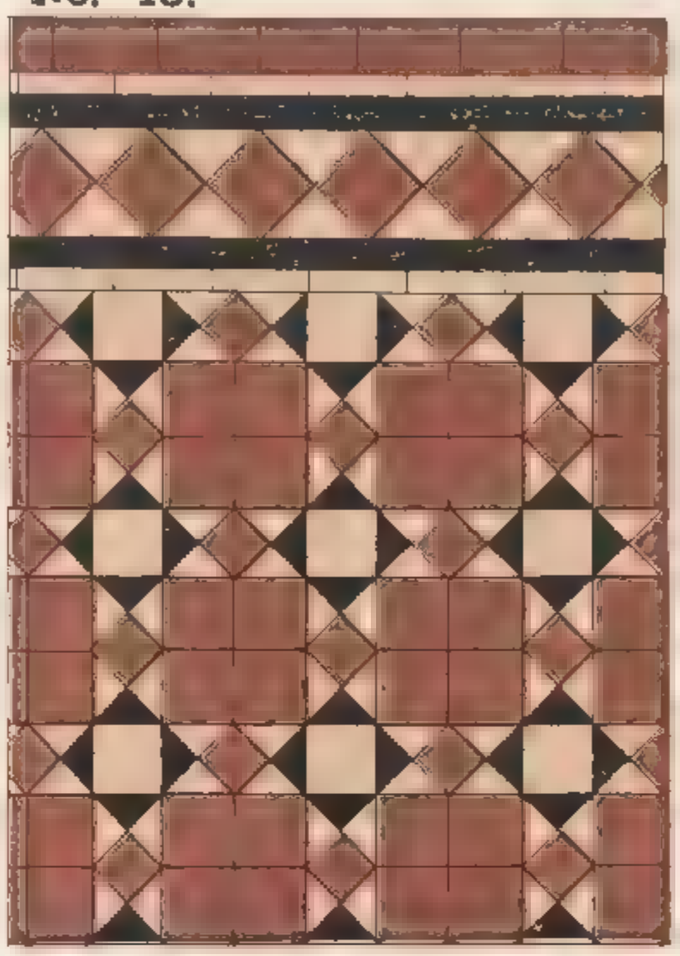

No. 44.

No. 45.

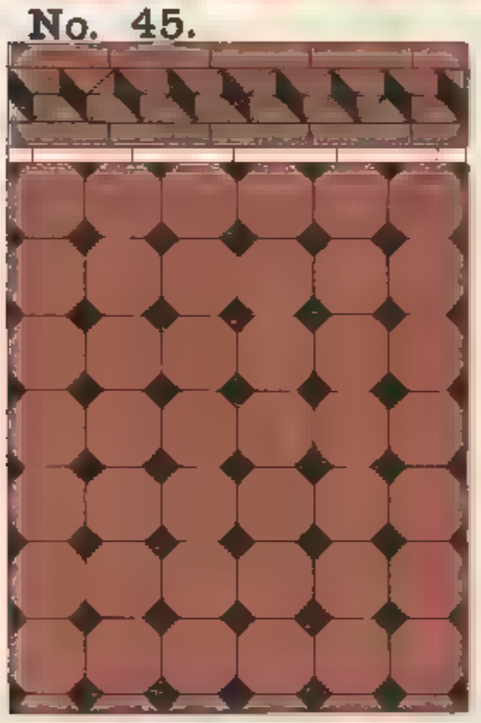

No. 46.

No. 47.

No. 48.

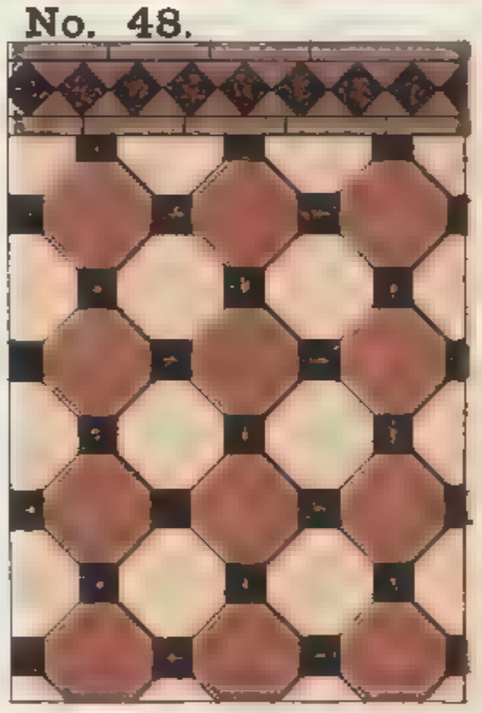

No. 49.

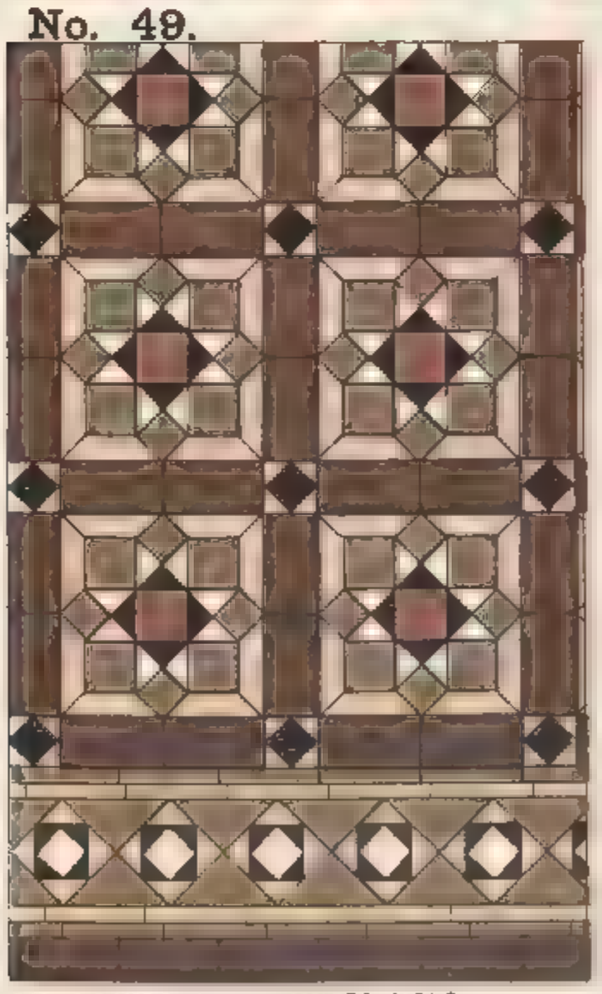

No. 50.

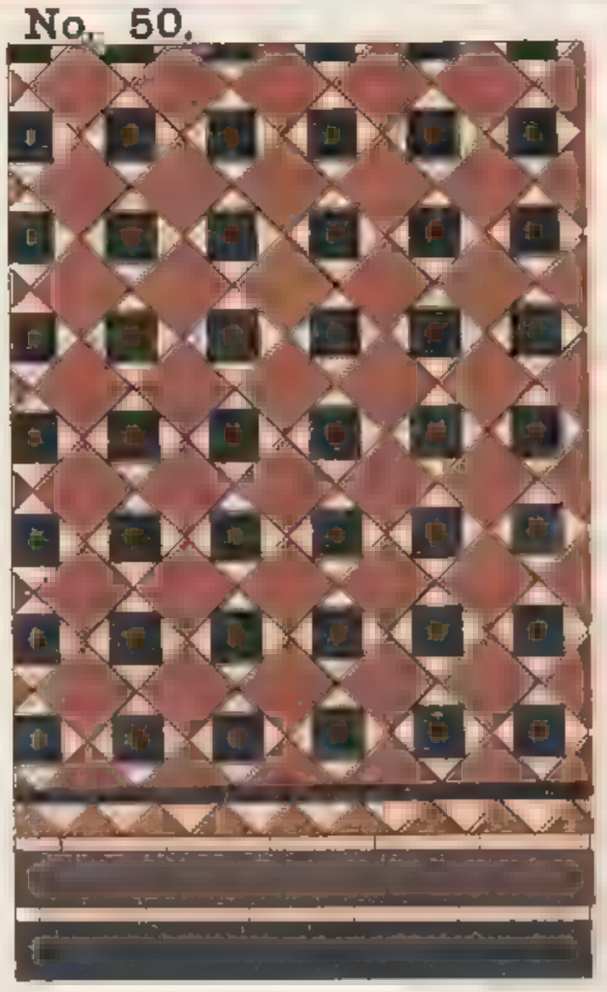

No. 51.

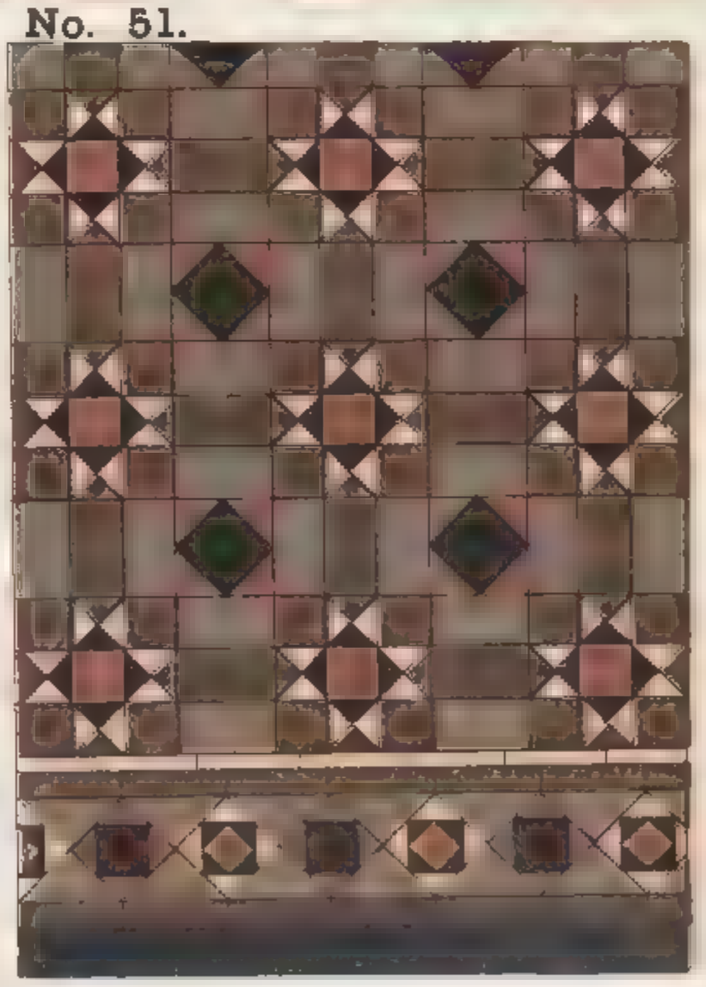

SANDS & McDOUGALL LIMITED MELB

SCALE, ¾ INCH TO A FOOT.

REGISTERED COPYRIGHT

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

PROPRIETARY

No. 52.

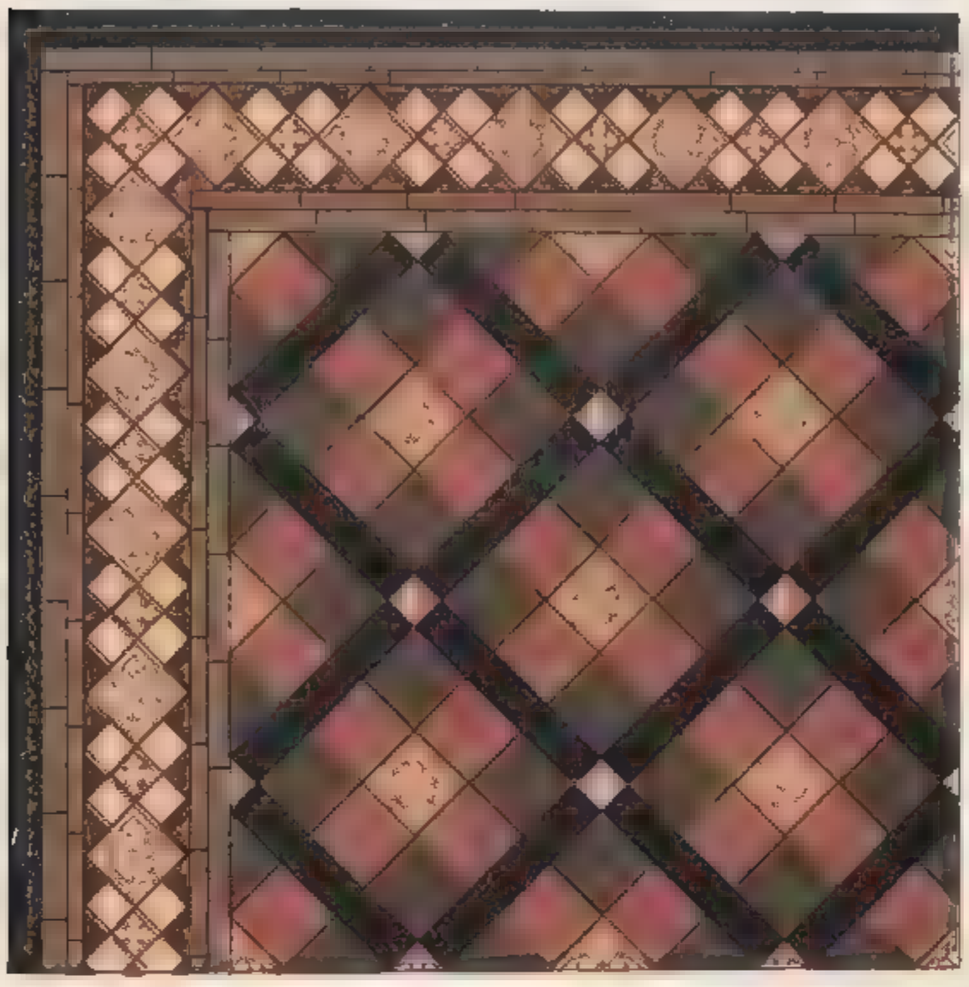

No. 53.

No. 54.

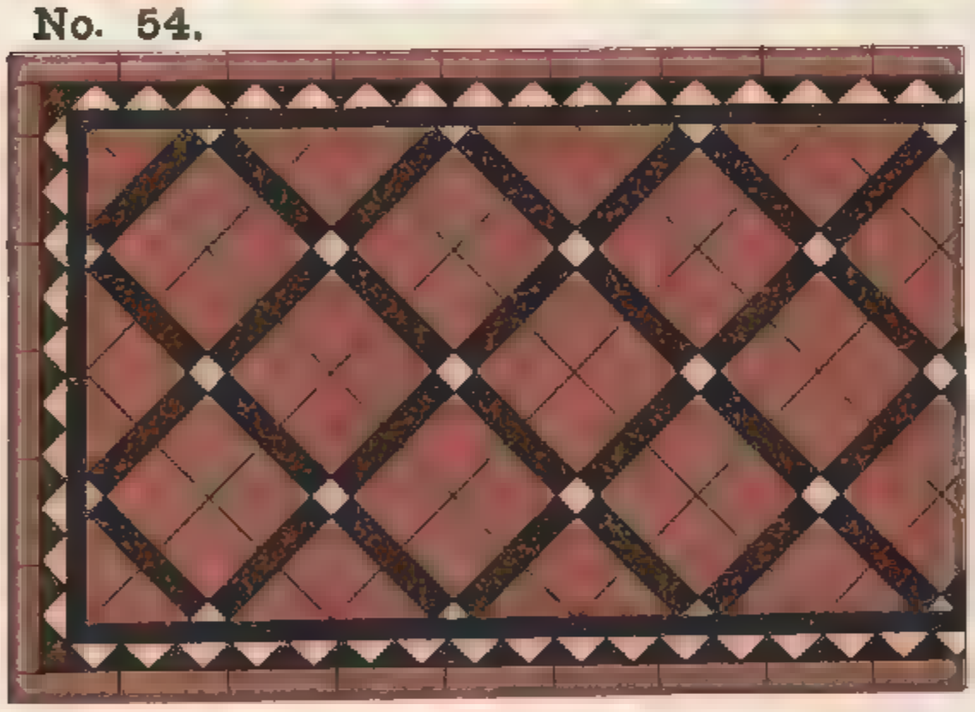

No. 55.

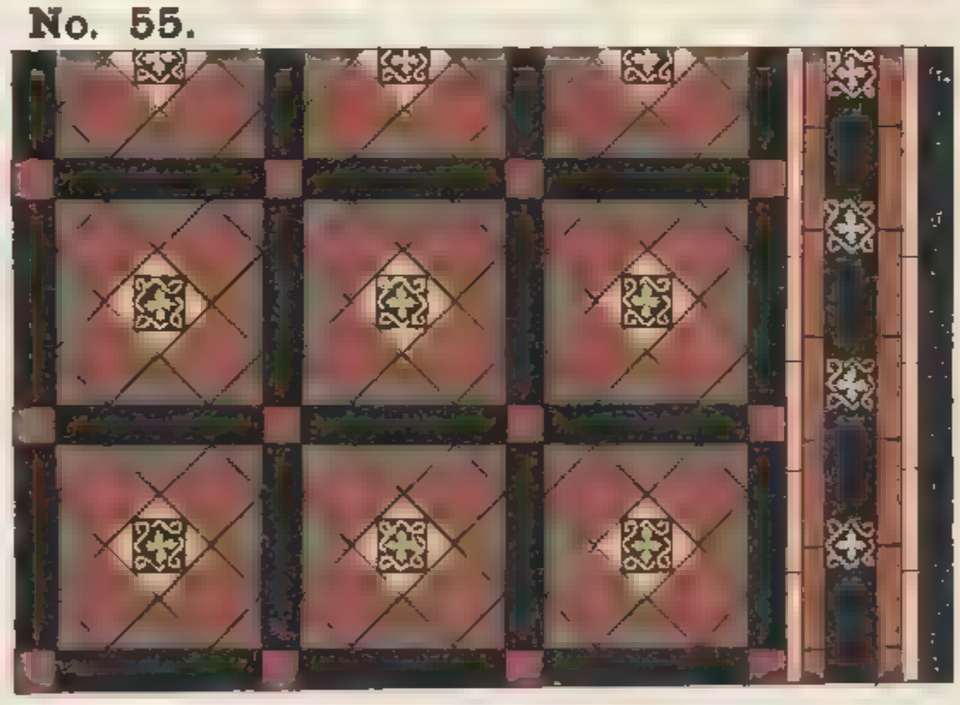

No. 56.

No. 57.

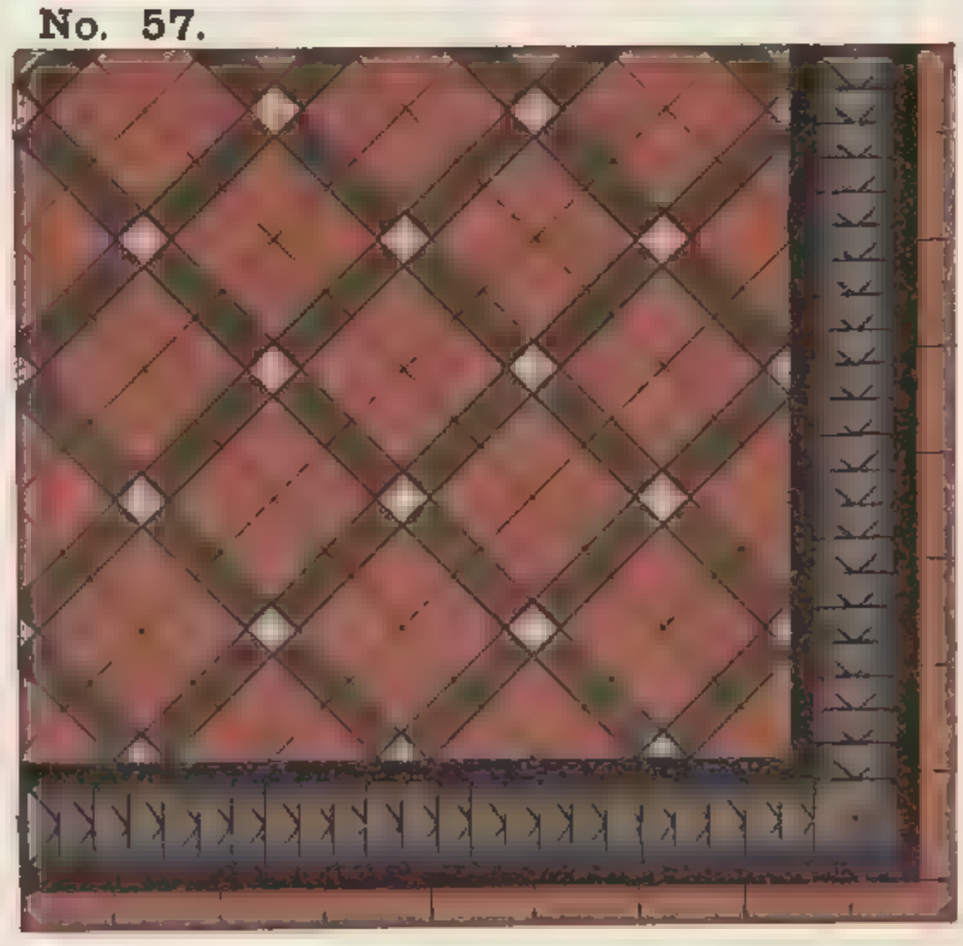

SANDS & McDOUGALL LIMITED MELB.

REGISTERED COPYRIGHT

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

No. 58.

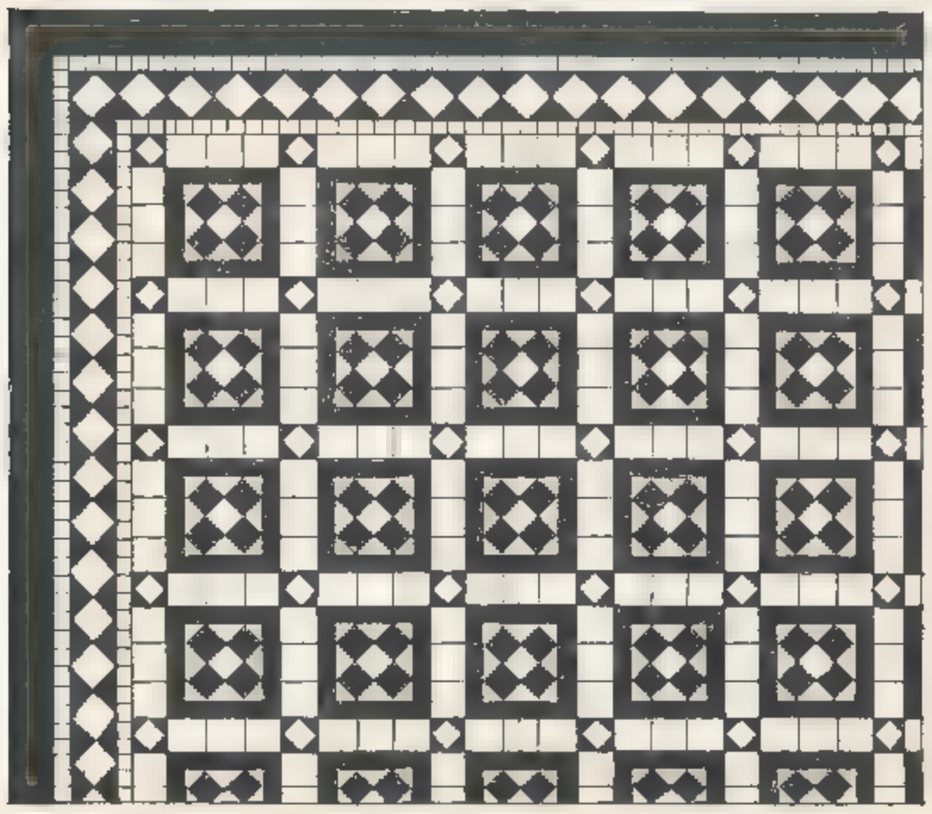

No. 59.

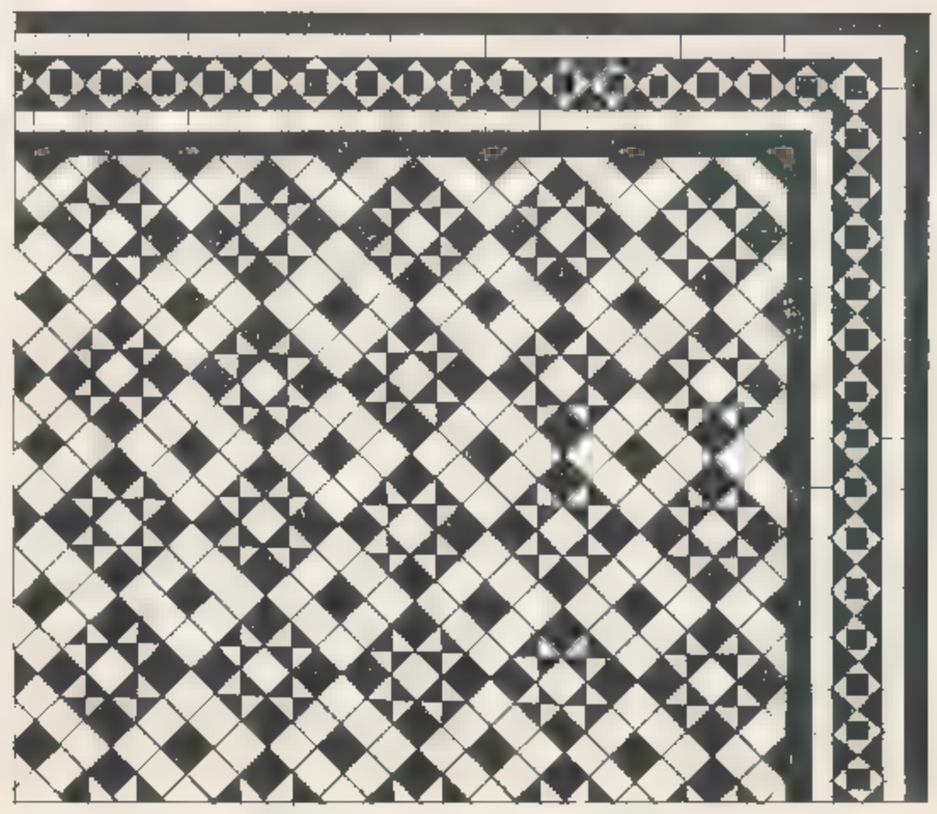

No. 60.

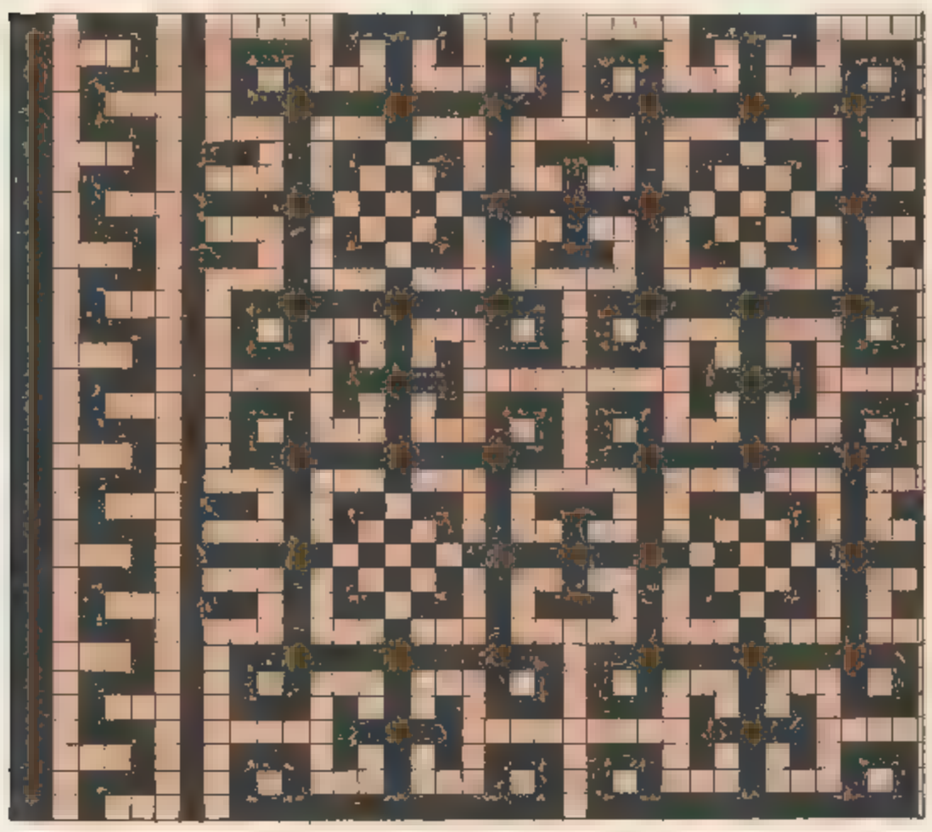

No. 61.

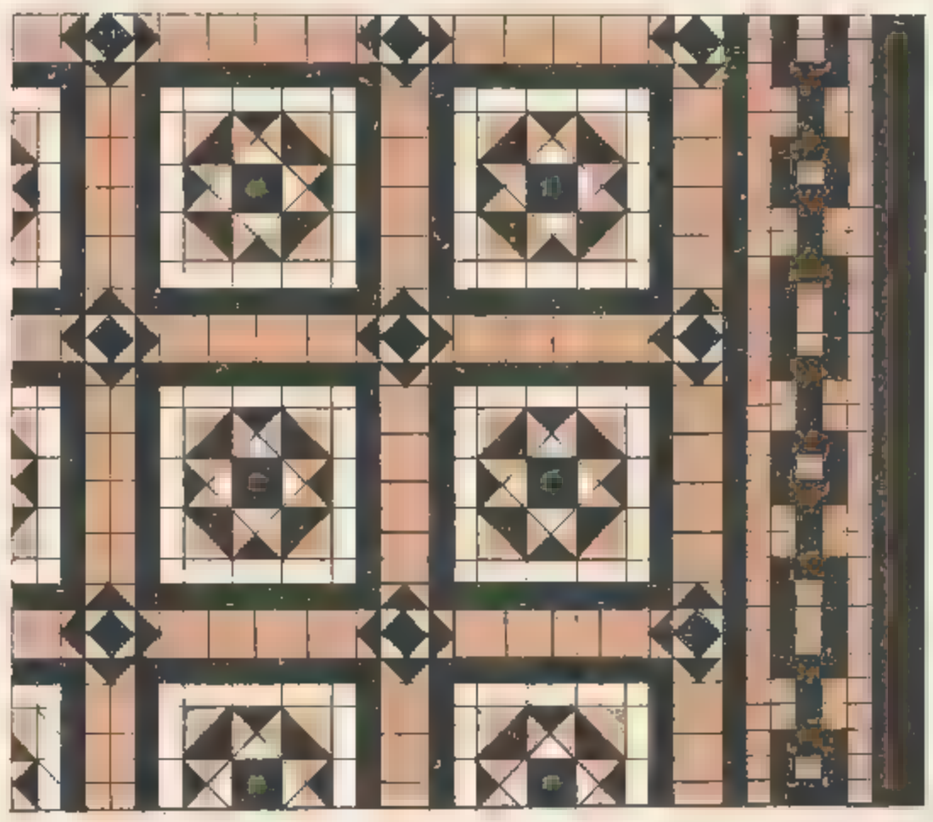

No. 62.

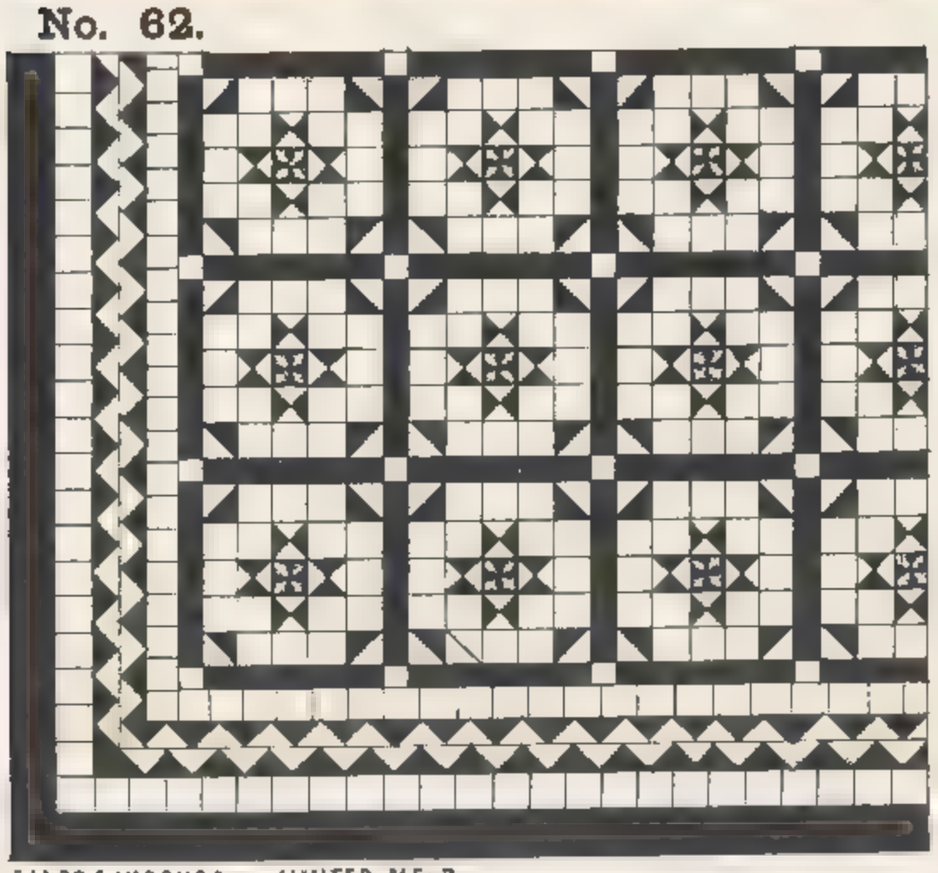

No. 63.

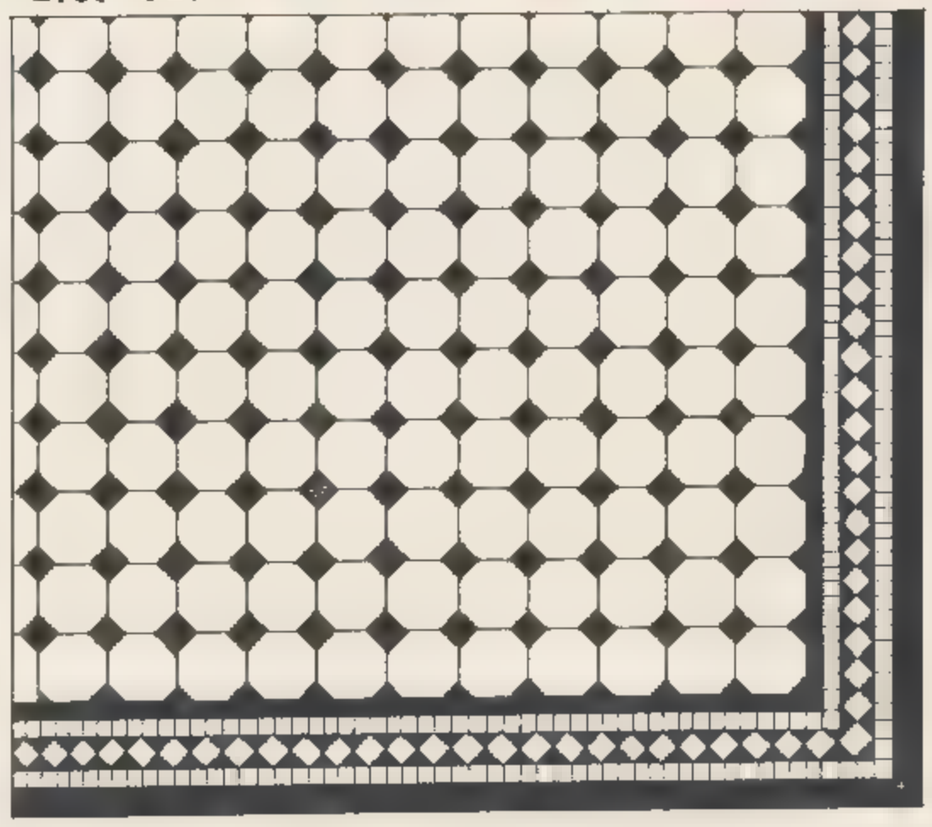

SANDS & McDOUGALL LIMITED, MELB

UNLIMITED COPYRIGHT

SCALE, ¾ INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

GLAZED HEARTHS.

No. 1.

No. 2.

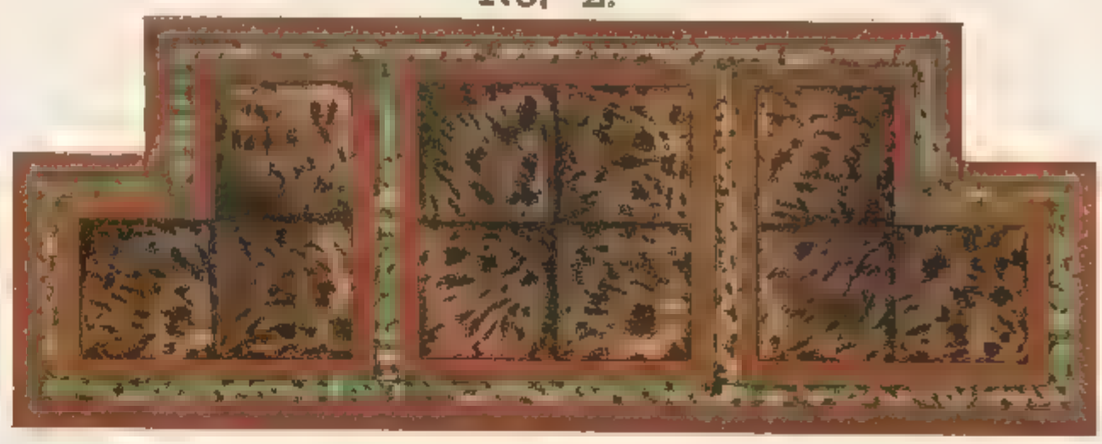

No. 3.

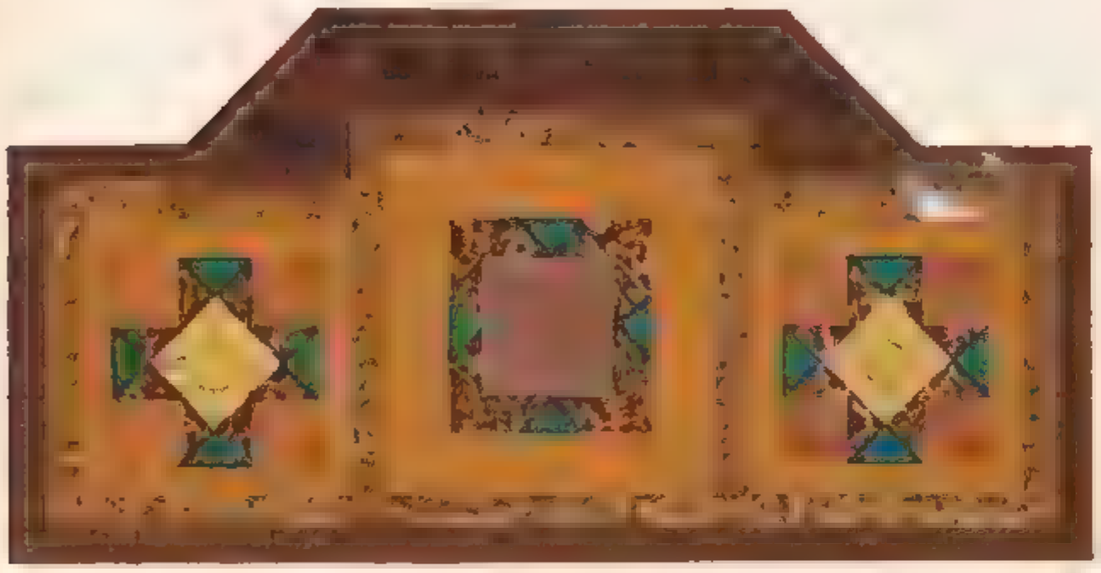

No. 4.

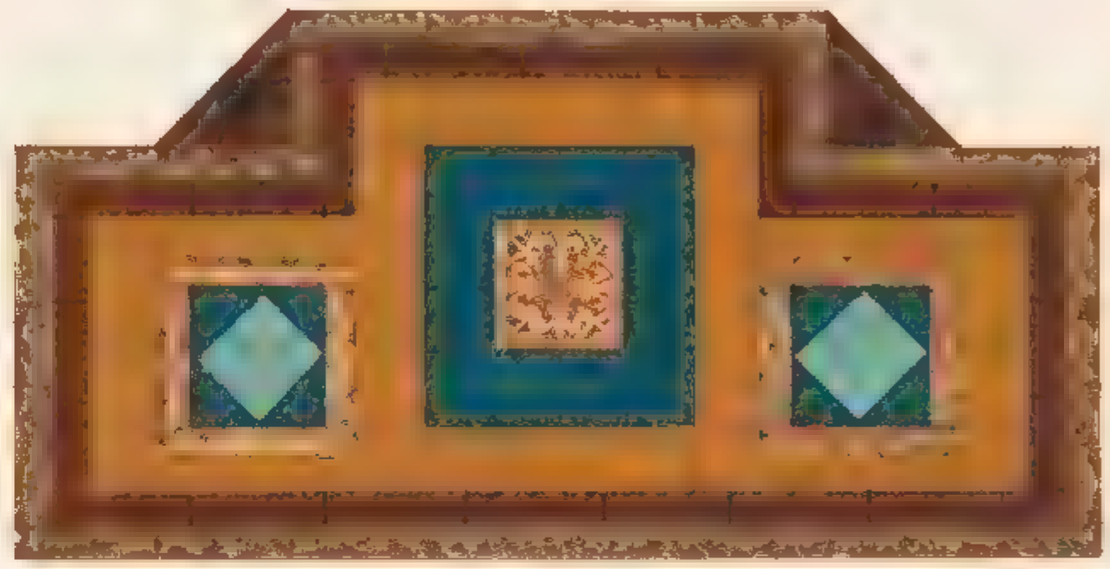

No. 5.

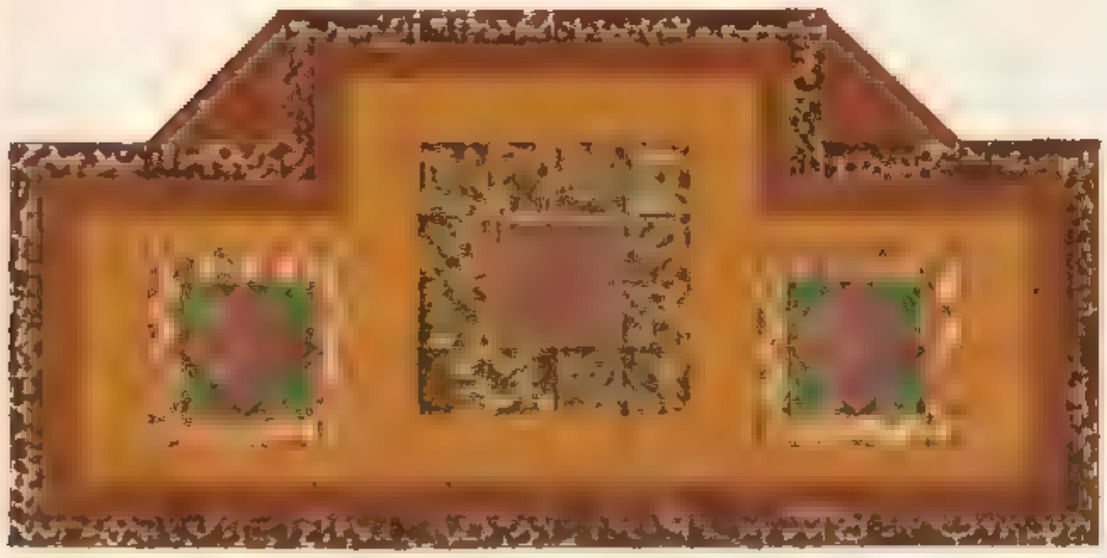

No. 6.

No. 7.

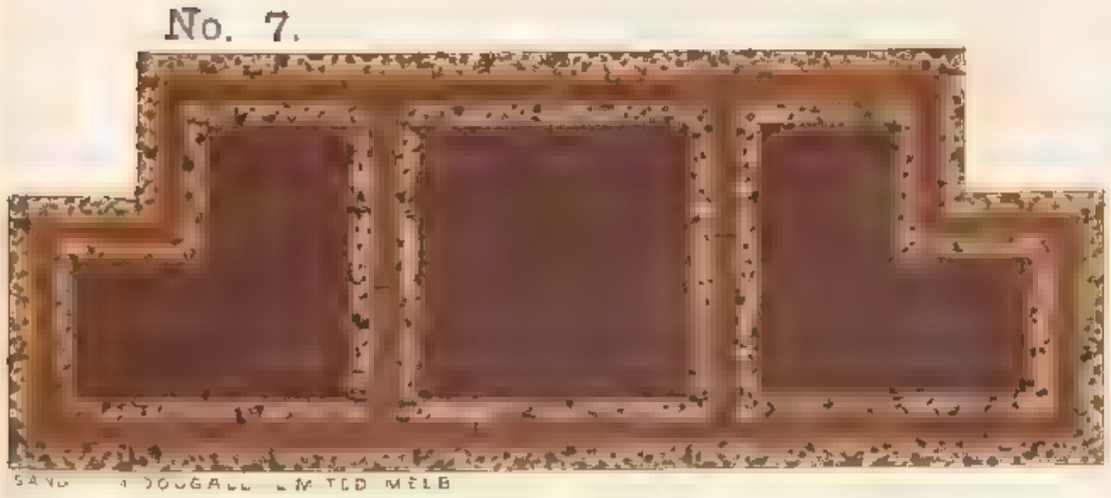

No. 8.

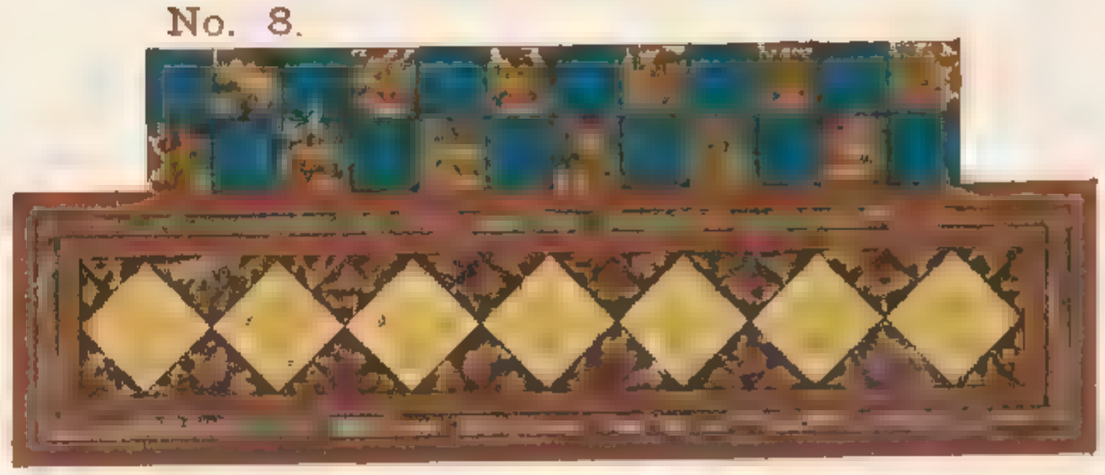

REGISTERED COPYRIGHT

SCALE, 1 INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

GLAZED HEARTHS.

No. 9.

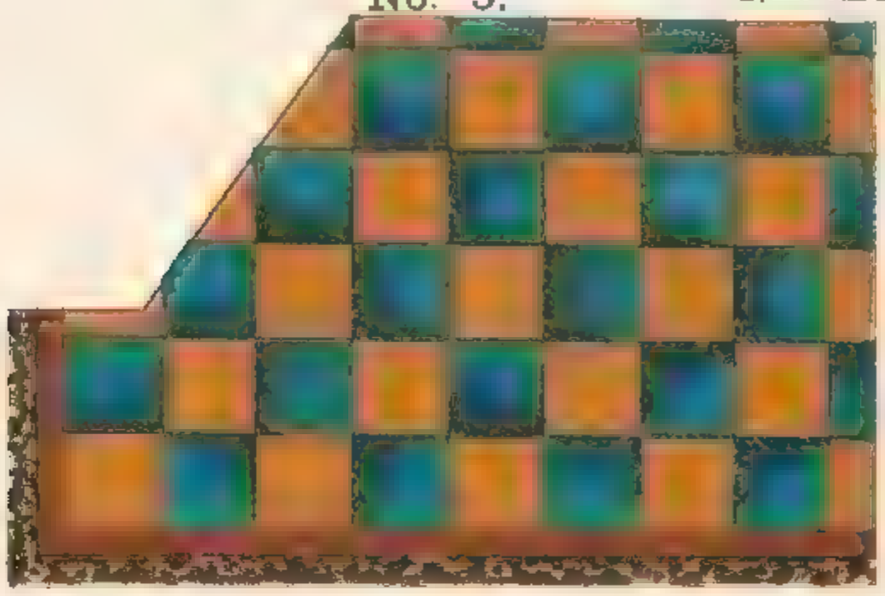

No. 10

No. 11.

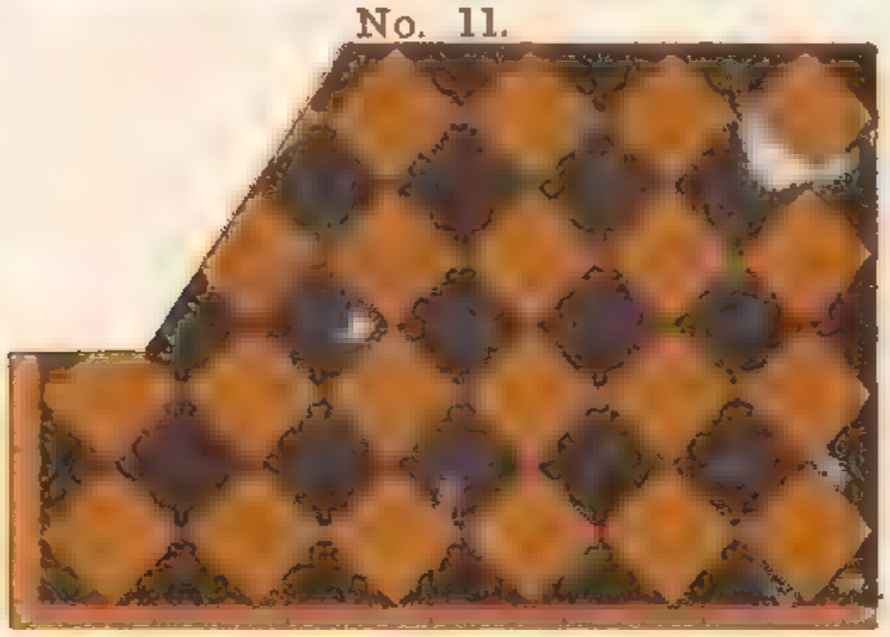

No. 12.

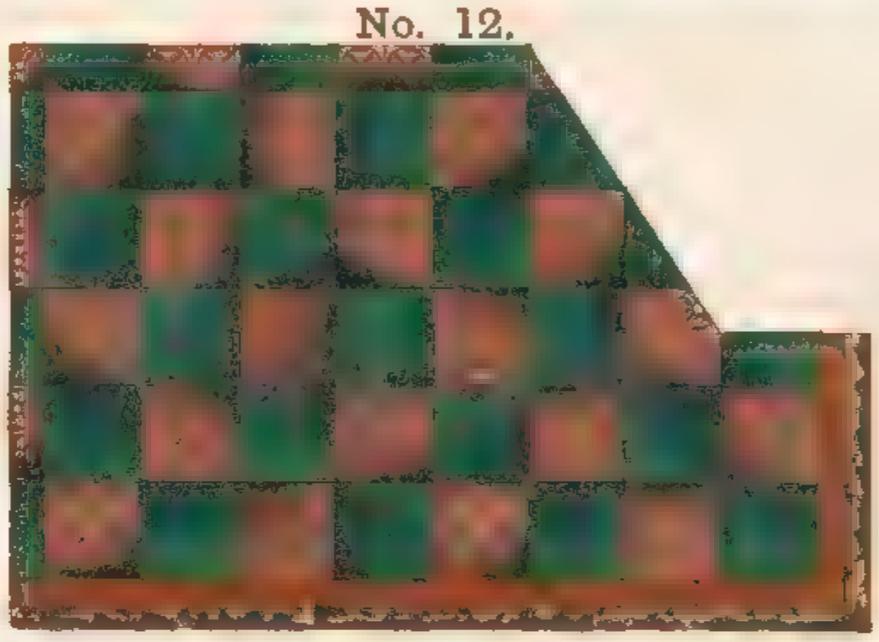

No. 13.

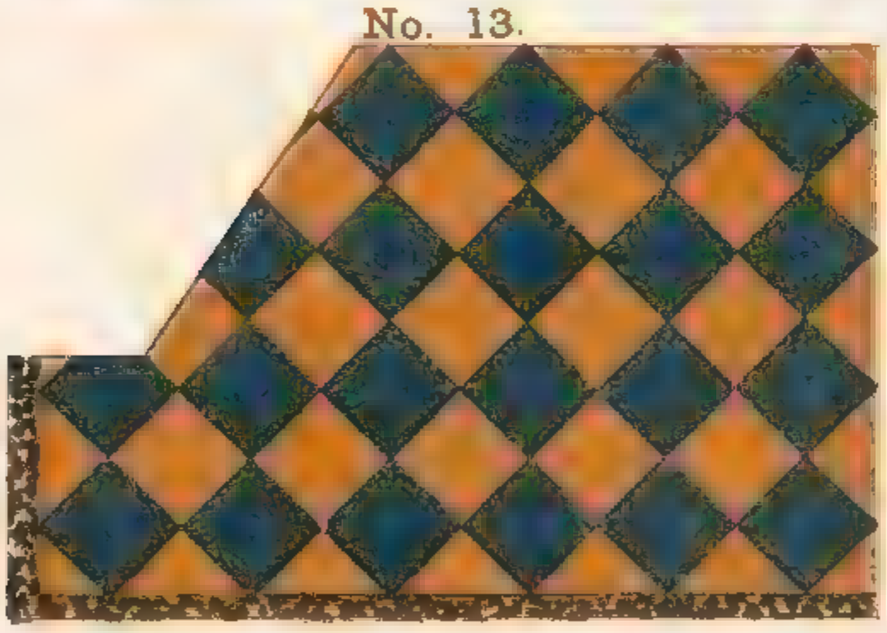

No. 14.

No. 15.

No. 16.

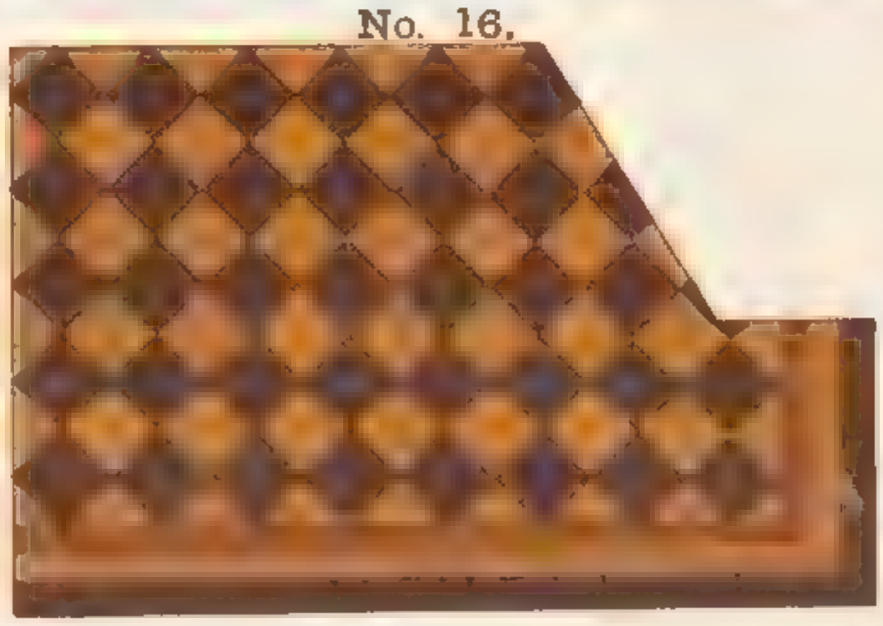

SANDS & McDOUGALL LIMITED MELB

REGISTERED COPYRIGHT

SCALE, 1 INCH TO A FOOT.

E. E. WALKER, Manager.

THE AUSTRALIAN TESSELATED TILE COMPANY LIMITED.

MITCHAM VICTORIA

PROPRIETARY

TERRA COTTA RIDGINGS & FINIALS, &c., &c.

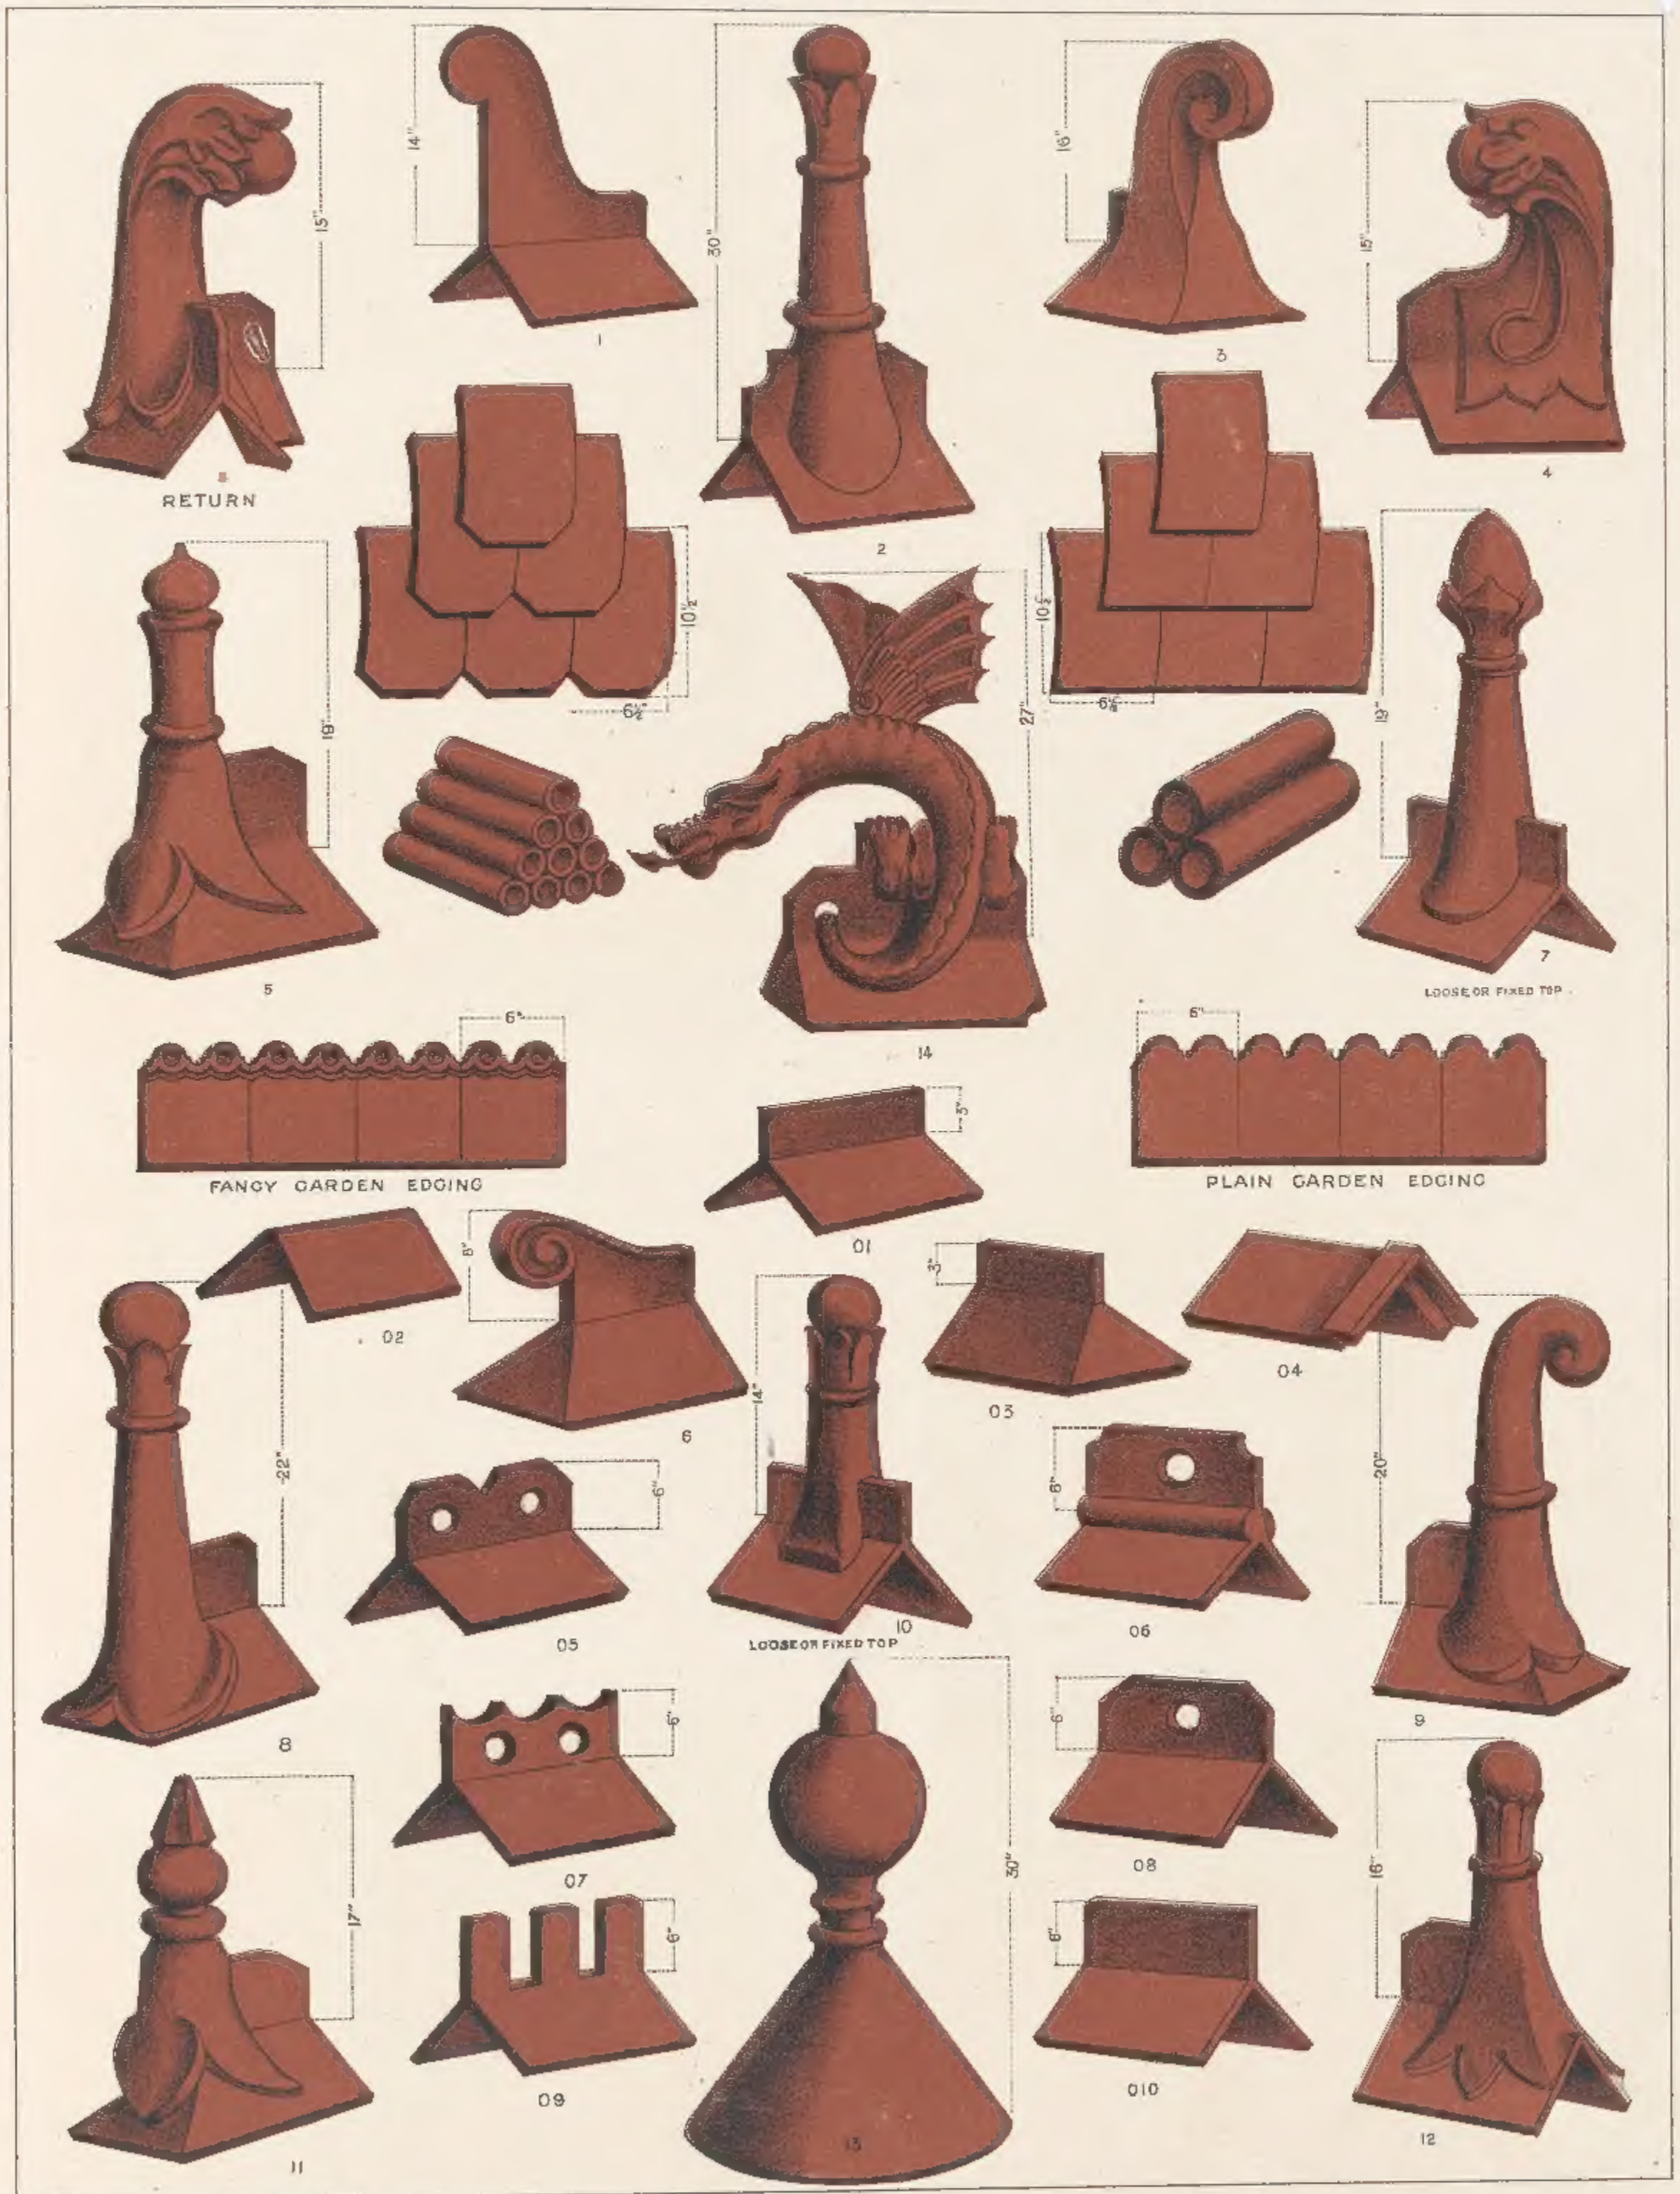

SANDS & McDOUGALL LIMITED, MELB.

RIDGING & FINIALS—AVERAGE 12 IN. IN LENGTH.

REGISTERED COPYRIGHT

E. E. WALKER, Manager.